




DOOR MANAGEMENT SYSTEMS

with technology
Click&Go
ZEROTIME®

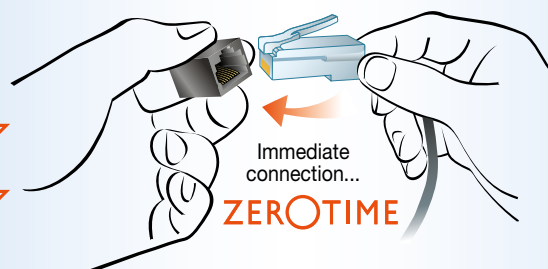

Insert the plug connector...
snap it in place...
that's all you need for
a perfectly working system...


Click&Go!

STAND-ALONE UNIT

Readers and numerical keypads
for creating access control systems



3 devices with 5 different functions,
in a single unified convertible module

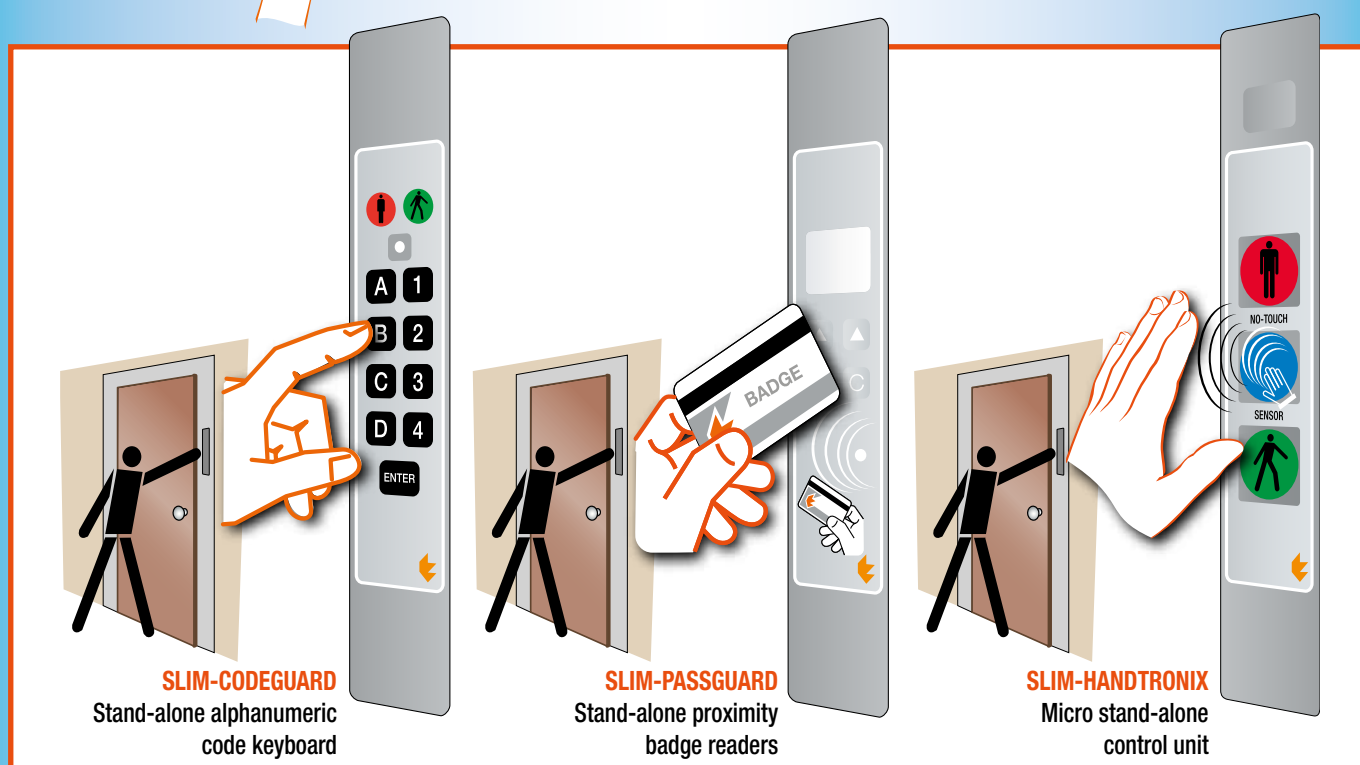


in 5 installation types next to door.

Ultraslim and supercompact devices in unified convertible format in 5 installation types next to door.

**SLIM &
MODULAR**

with technology
Click & Go
ZEROTIME®

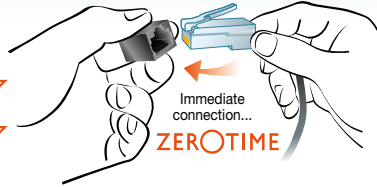


Insert the plug connector...
snap it in place...
that's all you need for
a perfectly working system...
Click&Go!

Alphanumeric
keypads
SLIM-CODEGUARD

Proximity
badge readers
SLIM-PASSGUARD

Micro stand-alone
control unit
SLIM-HANDTRONIX

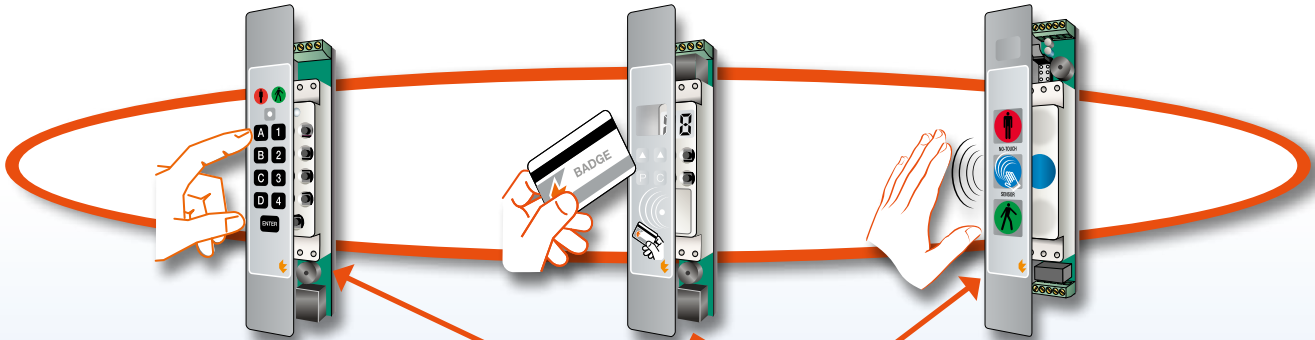


Unified module because....

A full SLIM & MODULAR range of devices with different functions, operations and purposes (code key pad, badge readers, micro stop and go display control panels, and stop and go display panels, entryphones and button panels on same series...) designed and made bearing in mind a single module of one size (Same for all). In fact, all the devices have the same appearance, size and modularity in order to be interchangeable and to be housed in the same unified chasing of the previous lock.

Convertible because...


Using unified flanges, cases and boxes, any unified SLIM & MODULAR device is convertible into 5 different types that can be installed in any way, next to the door, based on the assembly needs found in the field.

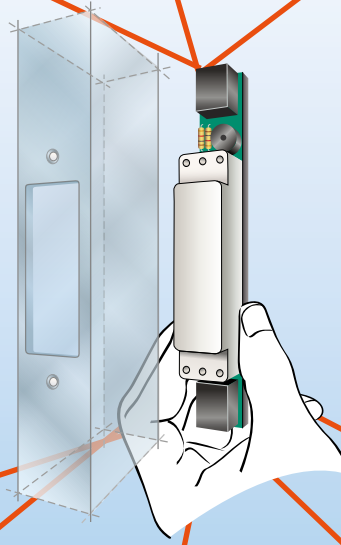

Assembly
type **1**

**fully aligned
concealed**
for recess-mounting
without flange on the
same plane of the
door frame panel


Unified body of modular
device recess mounted
set flush into surface
door frame level



Assembly
type **2**

**fully aligned
at milling**
or recess-mounting
with front flange
on the same plane
of the panel surface


Unified body of
modular device
with front flange



Assembly
type **3**

**for conventional
flush mounting**
with front flange
overlapping door frame


Unified body of
modular device
with conventional
front flange



Assembly
type **4**

for surface mounting
with using housing


Unified body of modular device
included in housing








Assembly
type **5**

for recessed wall-mounting
with flange and wall-mounting
receptacle

Unified body of
modular device with
front flange
and wall
mounting
receptacle



	SLIM-CODEGUARD STAND-ALONE PROFESSIONAL KEYPADS WITH ACCESS CODES With quick fitting 8 pole RJ45 plug to simplify installation and wiring Programmable and modifiable without limitations directly on site using the keypad (by entering the proprietary programming code, that can also be customised on-site). Length of access code: 2-8 digits (programmable). - "CLICK & GO" technology, with 1 RJ45 8-pole quick fitting female plug for connection to PHARMATRONIX control unit. - 8 alphanumeric keys + Enter key for entering the codes. - 2VDC/70 mA power supply. - NO → NC output contact (for code recognition), 12VDC/1A rating for door opening control, timed at app. 5 seconds. - two-color R/G LED + buzzer to confirm the opening of the door. - 1 self-adhesive cover in polycarbonate, 180 x 30 mm R2,5 - thickness 0.3 mm, with international symbols, available in 7 colours, designed to be applied after the final installation of the system.	Export Product-list January 2024  TECNODIMENSIONE®  <table border="1" style="width: 100%;"> <tr> <td style="width: 30%;">Ordering information </td> <td style="width: 30%;"></td> <td style="width: 40%; text-align: right;">Q.ty</td> </tr> <tr> <td>MODELS</td> <td></td> <td style="text-align: right;">N°</td> </tr> </table>	Ordering information 		Q.ty	MODELS		N°
Ordering information 		Q.ty						
MODELS		N°						
Models for 12Vdc/70mA power supply (on request on order models 24Vdc)								
Assembly type 1 fully aligned concealed for recess-mounting without flange on the same plane of the door frame panel * 	SLIM-CODEGUARD access code keypad, Type 1 "CLICK & GO" technology, with fully aligned concealed for recess-mounting on the same plane of the door frame panel without a flange. Ideal to achieve a surface (without roughness) that is easy to clean. Supplied with front panel and gap G for sections with a thickness of 1.6 mm. Complete with self-adhesive cover designed to be applied after the final installation of the system. * In this case it is advisable to prepare the recess during the door frame machining. Same with front panel and gap G for sections with a thickness of 3 mm.	<table border="1" style="width: 100%;"> <tr> <td style="width: 30%;">034991NW2U</td> <td style="width: 30%;"></td> <td style="width: 40%;"></td> </tr> <tr> <td>034991NW2U3</td> <td></td> <td></td> </tr> </table>	034991NW2U			034991NW2U3		
034991NW2U								
034991NW2U3								
Assembly type 2 fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface ♦ 	SLIM-CODEGUARD access code keypad, Type 2 "CLICK & GO" technology, for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out). Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 2.5 mm for recess-mounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange. Cover pre-assembled and fixed into the flange niche. ♦ In this case, it is advisable to prepare sunk milling during the panel machining phase.	<table border="1" style="width: 100%;"> <tr> <td style="width: 30%;">034992NW2U</td> <td style="width: 30%;"></td> <td style="width: 40%;"></td> </tr> </table>	034992NW2U					
034992NW2U								
Assembly type 3 for conventional flush mounting with front flange overlapping door frame 	SLIM-CODEGUARD access code keypad, Type 3 "CLICK & GO" technology, for traditional recessed fitting using flange. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50mm, thickness 4 mm for flush mounting. Cover pre-assembled and fixed into the flange niche. Mounting can be carried out "on site", directly onto the installed door frame.	<table border="1" style="width: 100%;"> <tr> <td style="width: 30%;">034993NW2U</td> <td style="width: 30%;"></td> <td style="width: 40%;"></td> </tr> </table>	034993NW2U					
034993NW2U								
Assembly type 4 for surface mounting with using housing 	SLIM-CODEGUARD access code keypad, Type 4 "CLICK & GO" technology, for mounting placed on surface using housing. With extra-strong protective housing, made in anodized silver finish aluminium (35 x 25 x 215 mm). Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame. Useful when you wish to avoid recess-mounting or cuts on the door frame.	<table border="1" style="width: 100%;"> <tr> <td style="width: 30%;">034994NW2U</td> <td style="width: 30%;"></td> <td style="width: 40%;"></td> </tr> </table>	034994NW2U					
034994NW2U								
Assembly type 5 for recessed wall-mounting with flange and wall-mounting receptacle 	SLIM-CODEGUARD access code keypad, Type 5 "CLICK & GO" technology, for recessed assembly using flange and wall box. Supplied with front flange in anodized aluminium with "silver" finish - 250 x 50 mm, thickness 4 mm, to be fixed to the housing by placing on wall surface. Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche. Also fitted with wall box with "wings" for rapid anchoring (65 x 30 x 230 mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the keypad. Wall niche and cable channel to be prepared beforehand.	<table border="1" style="width: 100%;"> <tr> <td style="width: 30%;">034995NW2U</td> <td style="width: 30%;"></td> <td style="width: 40%;"></td> </tr> </table>	034995NW2U					
034995NW2U								


Special configurations available at extra charge: Cover with your logo and/or customized.

For sizes, measurements and details of chasing, application examples and connection diagrams, see page 39.


SLIM-CODEGUARD keypads with access codes - sizes, application examples and connection diagram

Detail of the components and control buttons of the unit SLIM-CODEGUARD


Example of "Click & Go" connection via Masterwired cable

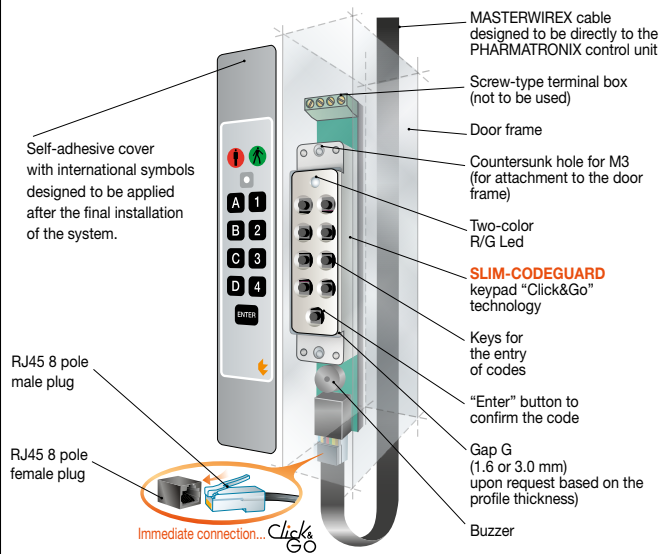


Assembly type ① fully aligned concealed for recess-mounting on the same plane of the door frame panel without a flange

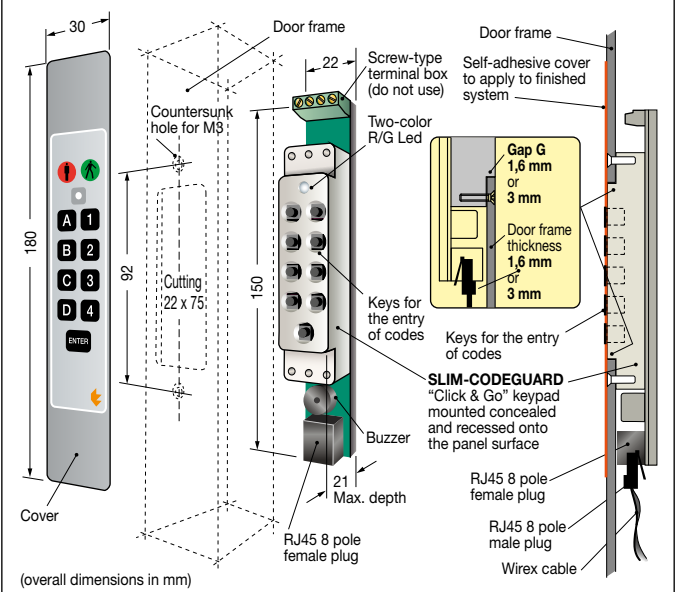


Assembly type ② fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface

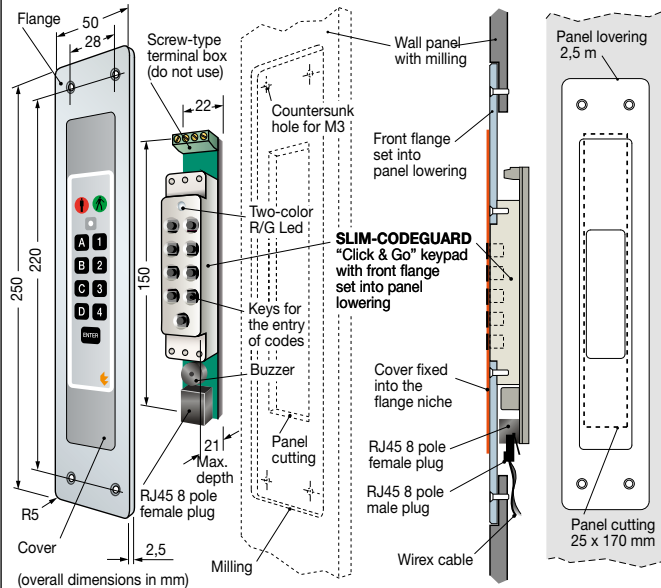

Assembly type ③ for conventional flush mounting with front flange overlapping door frame

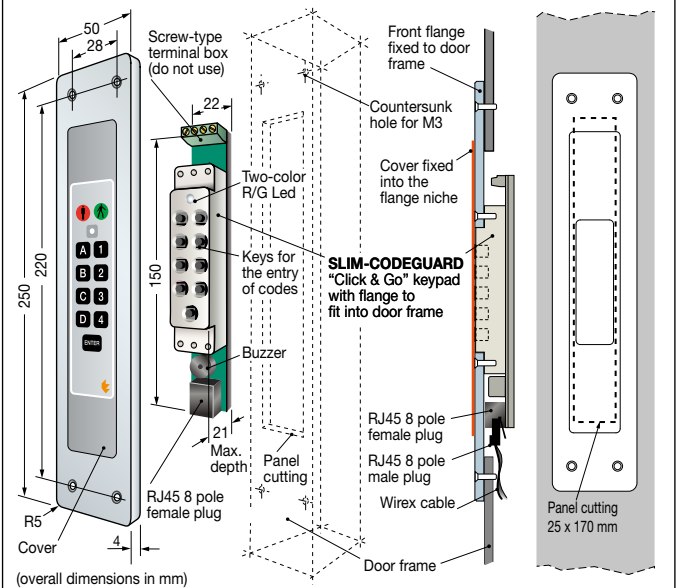

Assembly type ④ for surface mounting with using housing

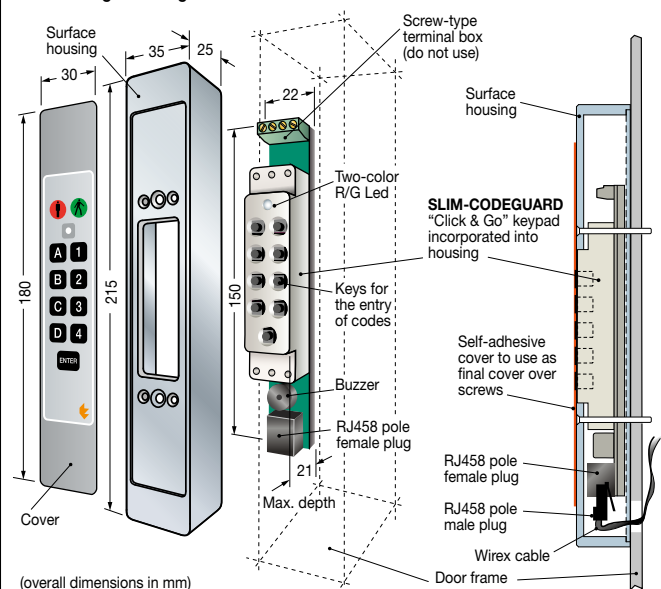

Assembly type ⑤ for recessed mounting in wall-mounting receptacle with flange and wall-mounting receptacle

