

SLIM & MODULAR

Ultra-slim and super-compact in a unified & convertible format.


Stop/go display
SLIM-DUALUX

Stop/go sensorized display
SLIM-DUALUX No-touch

Push-button unit
SLIM-DUALPUSH

Push-button with "mushroom"
SLIM-HELPPUSH

Intercom unit
SLIM-DUALVOX

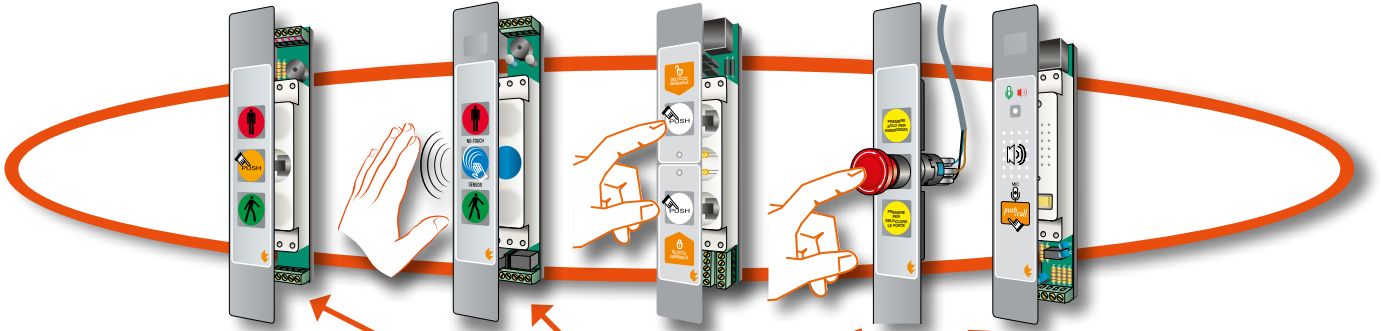


Unified module because....

A full SLIM & MODULAR range of devices with different functions, operations and purposes (stop and go displays, entryphones, keypads, such as code keypads, badge readers and micro stop and go display control units of the same series...) designed and made keeping a single module of the same size for all as a base element. In fact, all the devices have the same appearance, size and modularity to be interchangeable and housed in the same unified chasing of the previous lock.

Convertible because...


Using unified flanges, cases and boxes, any unified SLIM & MODULAR device is convertible into 5 different types that can be installed in any way, next to the door, based on the assembly needs found in the field.

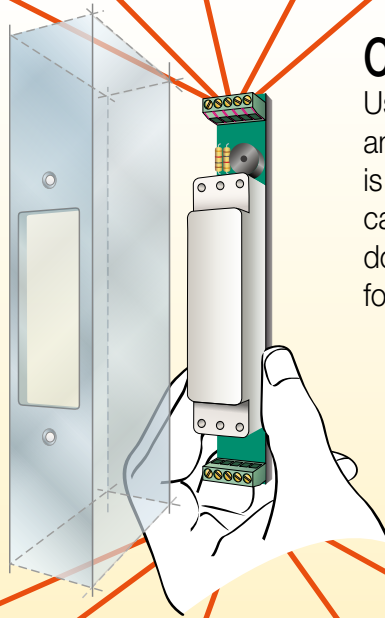

Assembly type

1

fully aligned concealed
for recess-mounting without flange on the same plane of the door frame panel




Unified body of modular device recess mounted set flush into surface door frame level

Assembly type

2

fully aligned at milling
for recess-mounting with front flange on the same plane of the panel surface




Unified body of modular device with front flange

Assembly type

3

for conventional flush mounting
with front flange overlapping door frame




Unified body of modular device with conventional front flange

Assembly type

4

for surface mounting
with using housing




Unified body of modular device included in housing

Assembly type

5

for recessed wall-mounting
with flange and wall-mounting receptacle

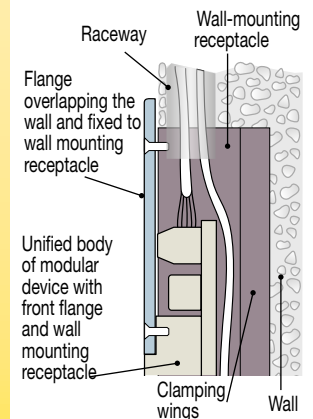

SLIM-DUALUX PROFESSIONAL STOP/GO DISPLAYS






Export Product-list
January 2024



- With 2 screw-on terminal boxes for conventional wiring
- Green/red lights + buzzer + multifunctional push button with "dry" changeover contacts (no voltage).
- 1 self-adhesive cover in polycarbonate, 180 x 30 mm, R2,5, thickness 0.3 mm with international symbols, available in 7 colours.

Ordering information

Q.ty

Assembly type	Models for 12Vdc/70mA power supply	MODELS	N°
Assembly type 1 fully aligned concealed for recess-mounting without flange on the same plane of the door frame panel * 	SLIM-DUALUX stop and go display type 1 with fully aligned concealed for recess-mounting on the same plane of the door frame panel without flange. Ideal to achieve a "smooth" surface (without roughness) that is easy to clean. Supplied with diffuser screen and gap G for sections with a thickness of 1.6mm. Complete with self-adhesive cover designed to be applied after the final installation of the system. * In this case it is advisable to prepare the recess during the door frame machining.	034981CM2U	
	Same with diffuser screen and gap G for sections with a thickness of 3mm.	034981CM2U3	
	Models for 24Vdc/40mA power supply (on request)		
	SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply with diffuser screen with G gap for sections with a thickness of 1.6mm	034981CM4U	
	Same with diffuser screen and gap G for sections with a thickness of 3mm.	034981CM4U3	
Assembly type 2 fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface ♦ 	SLIM-DUALUX stop and go display type 2 for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out). Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 2.5mm for recessmounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange. Cover pre-assembled and fixed into the flange niche. ♦ In this case, it is advisable to prepare sunk milling during the panel machining phase.	034982CM2U	
	Same with diffuser screen and gap G for sections with a thickness of 3mm.	034982CM2U3	
	Models for 24Vdc/40mA power supply (on request)		
	SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034982CM4U	
Assembly type 3 for conventional flush mounting with front flange overlapping door frame 	SLIM-DUALUX stop and go display type 3 for traditional recessed fitting using flange. Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 4mm for flush mounting. Cover pre-assembled and fixed into the flange niche. Mounting can be carried out "on site", directly onto the installed door frame.	034983CM2U	
	Same with diffuser screen and gap G for sections with a thickness of 3mm.	034983CM2U3	
	Models for 24Vdc/40mA power supply (on request)		
	SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply	034983CM4U	
Assembly type 4 for surface mounting with using housing 	SLIM-DUALUX stop and go display type 4 for mounting placed on surface using housing. With extra-strong protective housing, made in anodized silver finish aluminium (35x25x215mm). Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame. Useful when you wish to avoid recess-mounting or cuts on the door frame.	034984CM2U	
	Same with diffuser screen and gap G for sections with a thickness of 3mm.	034984CM2U3	
	Models for 24Vdc/40mA power supply (on request)		
	SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034984CM4U	
Assembly type 5 for recessed wall-mounting with flange and wall-mounting receptacle 	SLIM-DUALUX stop and go display type 5 for recessed assembly using flange and wall box. Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 4mm, to be fixed to the housing by placing on wall surface. Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche. Also fitted with wall box with "wings" for rapid anchoring (65x30x230mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the stop and go display. Wall niche and cable channel to be prepared beforehand.	034985CM2U	
	Same with diffuser screen and gap G for sections with a thickness of 3mm.	034985CM2U3	
	Models for 24Vdc/40mA power supply (on request)		
	SLIM-DUALUX stop and go display same but with 24 Vdc/40mA power supply.	034985CM4U	

Special configurations available at extra charge: Cover with your logo and/or customized.

For sizes, measurements and details of chasing, application examples and connection diagrams, see page 17.



SLIM-DUALUX No-touch PROFESSIONAL SENSORIZED STOP/GO DISPLAYS



- With 2 screw-type terminal box for conventional cables
- Green/red light + buzzer
- Equipped (instead of manual pressure button) with an infrared sensor that "sees" a presence up to 10 cm away. The "contactless" door-opening command and/or alarm works automatically by bringing the hand close, without touching anything.

- On board 1A/12Vdc relay with a dry exit contact (no voltage), programmable NO or NC, using the jumper.
- Timed command with exit relay that starts and remains activated for 8 seconds, each time the hand comes near the No-touch sensor's range of action.
- 1 adhesive cover in polycarbonate, 180x30mm, R2,5, thickness 0.3mm with 7-colour international symbols.

Export Product-list
January 2024



TECNODIMENSIONE®

Ordering information


Q.ty

Models for 12Vdc/70mA power supply

MODELS

N°

Assembly type 1
fully aligned concealed for recess-mounting without flange on the same plane of the door frame panel *



SLIM-DUALUX No-touch stop and go display type 1 with fully aligned concealed for recess-mounting on the same plane of the door frame panel without flange. Ideal to achieve a "smooth" surface (without roughness) that is easy to clean. Supplied with diffuser screen and gap G for sections with a thickness of 1.6mm. Complete with self-adhesive cover designed to be applied after the final installation of the system.


*** In this case, it is advisable to prepare sunk milling during the panel machining phase.**

034981HM2U

Same with diffuser screen and gap G for sections with a thickness of 3mm.

034981HM2U3

Assembly type 2
fully aligned at milling for recess-mounting with front flange on the same plane of the panel surface ◆




SLIM-DUALUX No-touch stop and go display type 2 for aligned recessed flush fitting in bottom of panel using front flange (e.g. To mount on wall panel next to the door frame on the post where no chasing can be carried out).

Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 2.5mm for recess-mounting on the same plane of the panel surface for aligned recessed flush fitting in bottom of plane using front flange. Cover pre-assembled and fixed into the flange niche.

◆ In this case, it is advisable to prepare sunk milling during the panel machining phase.

034982HM2U

Assembly type 3
for conventional flush mounting with front flange overlapping door frame




SLIM-DUALUX No-touch stop and go display type 3 for traditional recessed fitting using flange.

Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 4mm for flush mounting. Cover pre-assembled and fixed into the flange niche.

Mounting can be carried out "on site", directly onto the installed door frame.

034983HM2U

Assembly type 4
for surface mounting with using housing



SLIM-DUALUX No-touch stop and go display type 4 for mounting placed on surface using housing.


With extra-strong protective housing, made in anodized silver finish aluminium (35x25x215mm).

Self-adhesive cover in polycarbonate, provided separately and designed to be used as final cover to hide the 4 fixing screws of the housing on the door frame

Useful when you wish to avoid recess-mounting or cuts on the door frame.

034984HM2U

Assembly type 5
for recessed wall-mounting with flange and wall-mounting receptacle



SLIM-DUALUX No-touch stop and go display type 5 for recessed assembly using flange and wall box.

Supplied with front flange in anodized aluminium with "silver" finish - 250x50mm, thickness 4mm, to be fixed to the housing by placing on wall surface.

Self-adhesive cover in polycarbonate pre-assembled and fixed into the flange niche.

Also fitted with wall box with "wings" for rapid anchoring (65x30x230mm), in plastic taken from single block to be assembled "in a niche" in the wall to house the body of the stop and go display No-touch.

Wall niche and cable channel to be prepared beforehand.


034983HM2U

Special configurations available at extra charge: Cover with your logo and/or customized.


For sizes, measurements and details of chasing, application examples and connection diagrams, see page 19.

SLIM-DUALUX No-touch STOP & GO DISPLAYS - sizes, application examples and connection diagram


Assembly type 1 total alignment, lock recessed into surface without flange

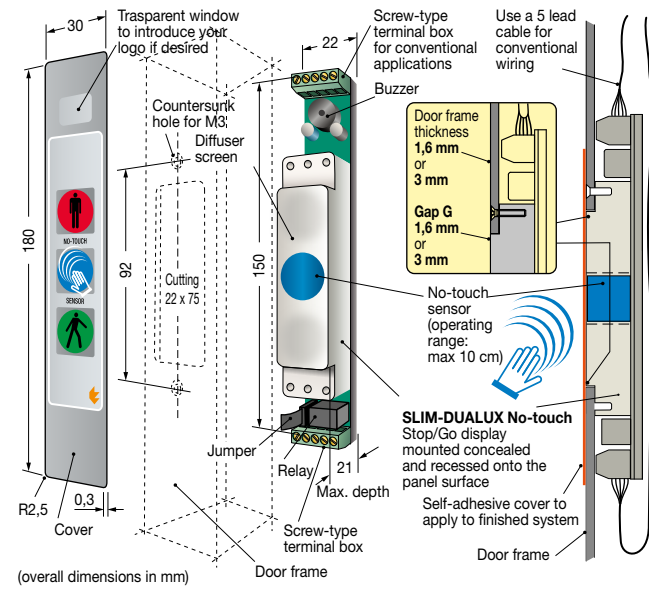


Assembly type 2 alignment at bottom with front flange "flush with surface" at bottom

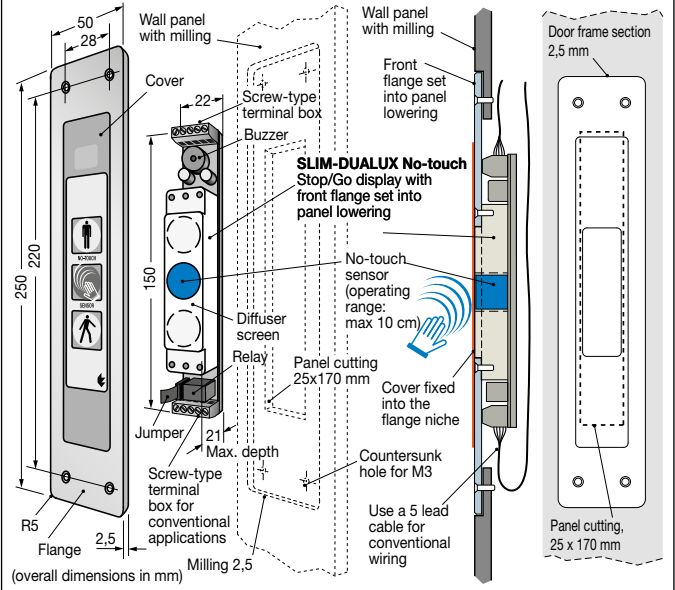


Assembly type 3 traditional fitting with front flange over the lock

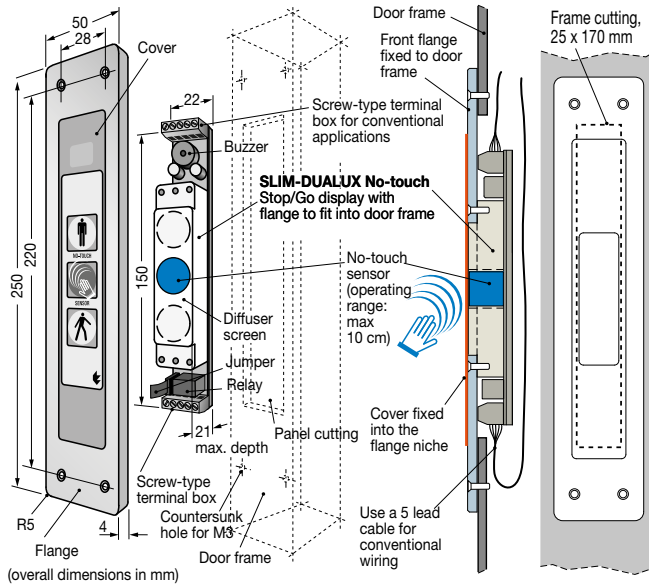

Assembly type 4 for mounting placed on surface using housing

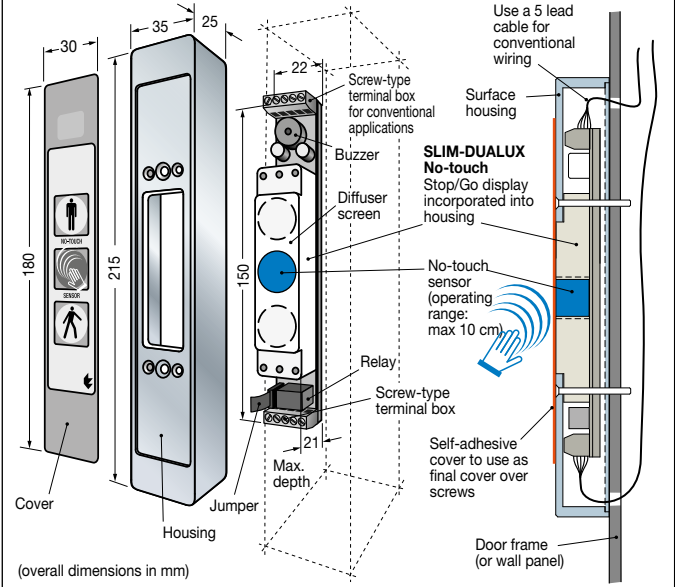

Assembly type 5 for recessed wall mounting with flange and wall box

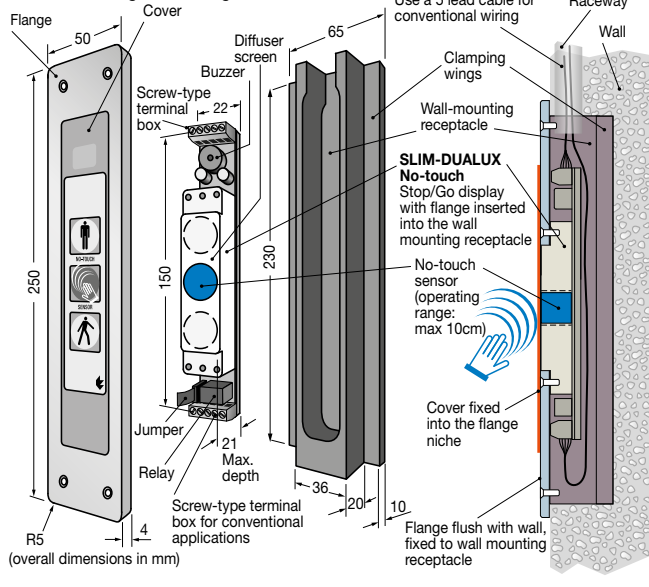

CONNECTION DIAGRAM valid for all 5 types

