



Solenoid drop bolts, electrical door strikes and electromagnets in "CLEAN COVER" case made by solid block of anodised aluminium.

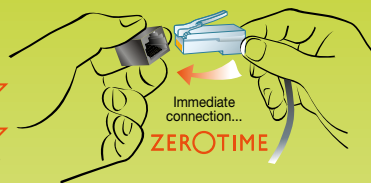


Insert the plug connector...
snap it in place...
that's all you need for
a perfectly working system...
Click&Go!

No cutting the frame
no work on internal frame
grain!


Only a portable drill is needed
to easily install **DRILL&GO**
devices on any frame.

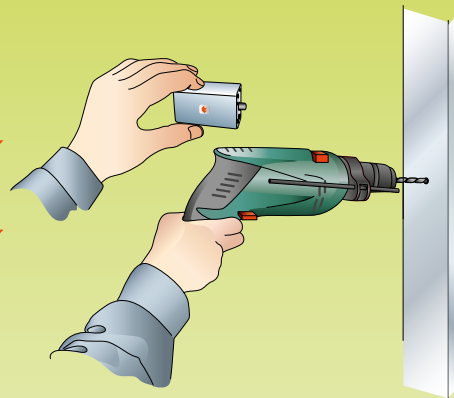


innovation
FOR EASY INSTALLATION
SURFACE MOUNT

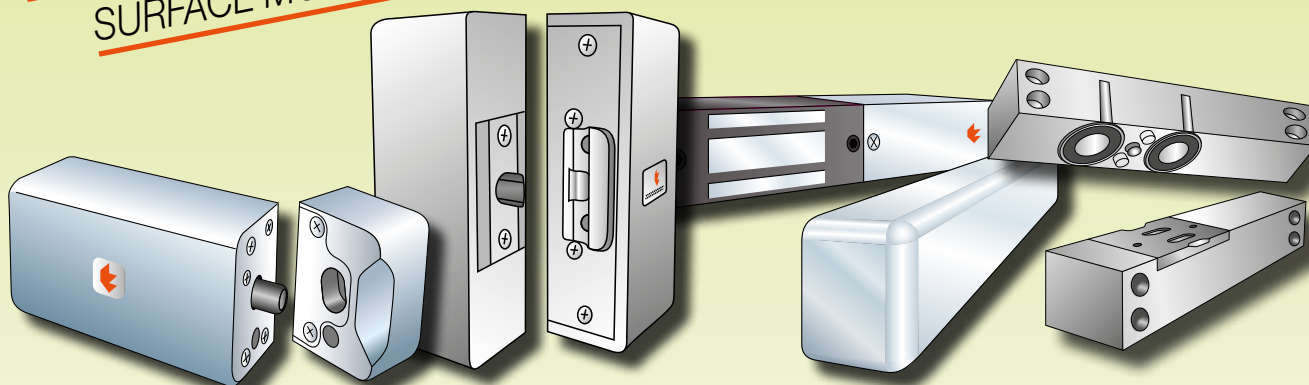


MICROREDLOCK
in "CLEAN COVER"
for surface-mounting

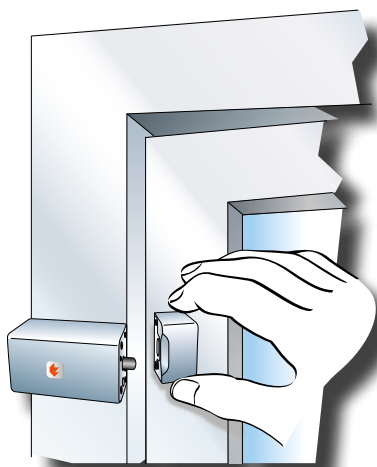

SLIM-DOORSTRIKE
in "CLEAN COVER"
for surface-mounting

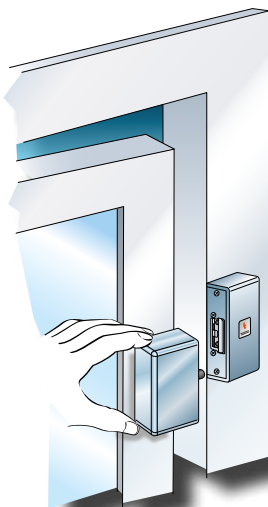

SLIM-MINISENTRYLOCK
and **SLIM-SHEARLOCK**
in "CLEAN COVER"
for surface-mounting

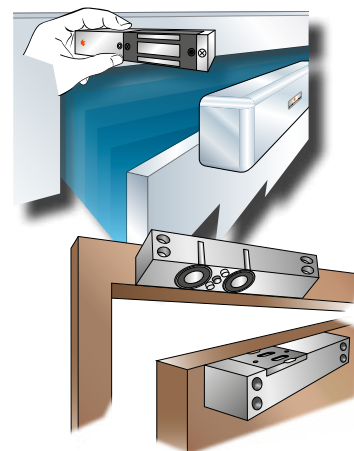


MICROREDLOCK, SLIM-DOORSTRIKE, SLIM-MINISENTRYLOCK and SLIM-SHEARLOCK

All provided with a "CLEAN COVER" made from silver-coloured, solid anodized aluminium,
ultra-slim, designed to be easily installed on the door surface without any holes and/or cuts in the frame...

... it's **DRILL&GO CUT-FREE!**

INNOVATION

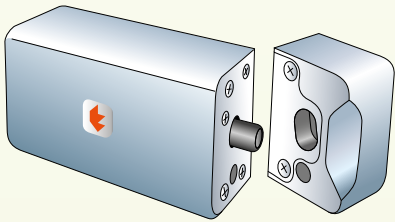

MICROREDLOCK

in "CLEAN COVER" for easy installation surface mount

PROFESSIONAL TECNODIMENSIONE ELECTRICAL DROP BOLTS

With full coverage "CLEAN COVER" made by solid block of anodised aluminium.

FOR EASY INSTALLATION
SURFACE MOUNT



innovation




One unit...
for 4 different needs.

- 1st No frame cutting nor work on internal nervures.
Just drill to install = **DRILL& GO CUT-FREE**
- 2nd instant wiring ZEROTIME = **Click&Go**
- 3rd housed into CLEAN COVER fully made by a solid block of anodised aluminium, easy to clean with appropriate detergents = **CLEAN**
- 4th fail-safe; it automatically unlocks in the event of power failure freeing the door for emergency exit also in the event of fire = **FAIL-SAFE**


IDEAL FOR SURFACE APPLICATIONS
ON "CLEAN ROOM" LOCKS.

1st
**DRILL&GO
CUT-FREE**

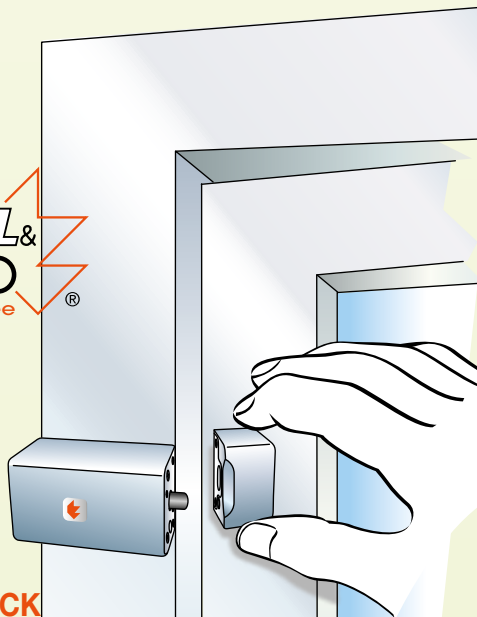

MICROREDLOCK
it is ultra-slim, designed to be easily installed
on the door surface without any
holes and/or cuts in the frame...
... it's **DRILL&GO CUT-FREE!**


2nd
Click&GO

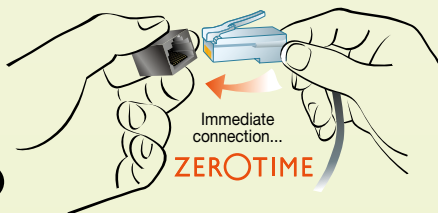

Insert the plug connector... snap it in place...
that's all you need
for a perfectly working system...

Click&Go!

3rd
CLEAN

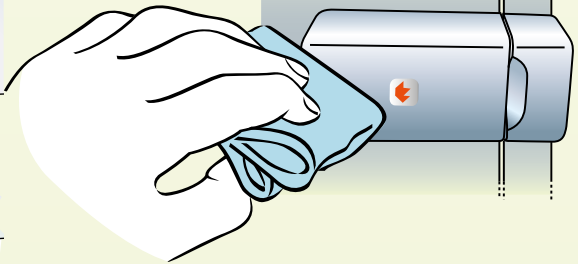


MICROREDLOCK
housed into protective smooth "CLEANCOVER"
(roughness-free) ...
easy to clean with appropriate detergents...
... it's **CLEAN!**

4th
FAIL-SAFE



MICROREDLOCK
Automatic fail-safe unlock = bolt "in"
without power, bolt "out" when powered.
In the event of fire or power failure it
automatically unlocks freeing the exit...
... it's **FAIL-SAFE!**

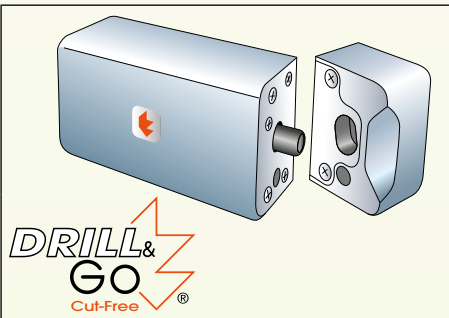

UNIVERSAL ELECTRICAL DROP BOLTS

MICROREDLOCK

in "CLEAN COVER"

by single block for easy surface mount

Export Product-list
January 2024




TECNODIMENSIONE®

Mini-electrical drop bolt with full coverage "CLEAN COVER" made by solid block of anodised aluminium. Ideal for surface mount and surface applications on any type of "CLEAN ROOM" door frame.

ordering information		Q.ty
MODELS		N°

MICROREDLOCK "Click & Go" for surface mounting in protective "CLEAN COVER" housing

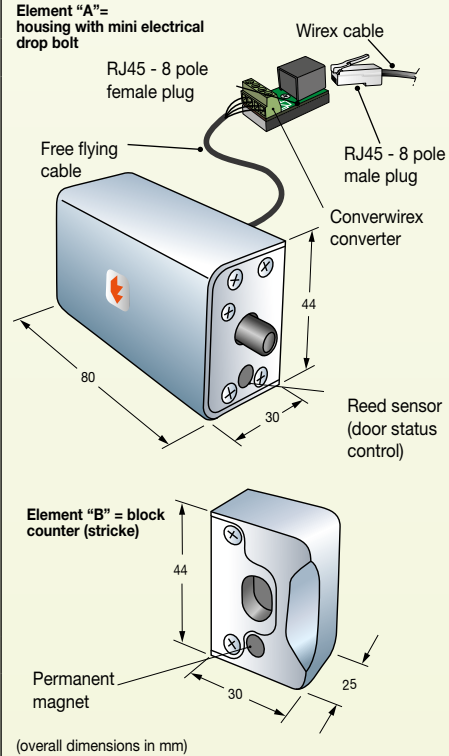

Ultra compact MICROREDLOCK mini-electrical drop bolt housed in protective "smooth" (roughness-free) and easy to clean case. Manageable and easy to install on door surfaces without any need to drill and/or cut door frames.

Models for 12 Vdc power supply

MICROREDLOCK mini-electrical drop bolt in "CLEAN COVER". Complete with flying cable (2m) with "CLICK & GO" Converwirex converter with 1 female RJ45-8 pole quick fit plug for instant connection to the Pharmatronix control unit via structured and pre-assembled Wirex cables. Protective Anticorodal, anodised and mechanically brushed aluminium "CLEAN COVER" made by solid block for easy installation with concealed retractable non-removable bracket.

- The kit contains two components:
- element "A": is the case that includes the electrical drop bolt** to be secured on the door counter frame.
 - element "B": is the loose reference bolt** to be secured on the door leaf frame matching element "A".
- FAIL-SAFE (anti-panic = unlock without power) version with 100% ED coil for a continuous operation.
 - Includes a Reed sensor to control door status.
 - Power supply 12 V DC/390 mA.
 - Element A dimensions 80 x 30 x 44 mm
 - Element B dimensions 25 x 30 x 44 mm
 - Weight g 320


00803A2RCZW
Lh/Rh reversible

Models for 24Vdc power supply (on request)

Models with 24Vdc power supply (on request)
Mini-electrical drop bolt for MICROREDLOCK surface mount in "CLEAN COVER" like above but with 24Vdc/140mA power.


00803A4RCZW

MICROREDLOCK mini-electrical drop bolt in "CLEAN COVER" installation method

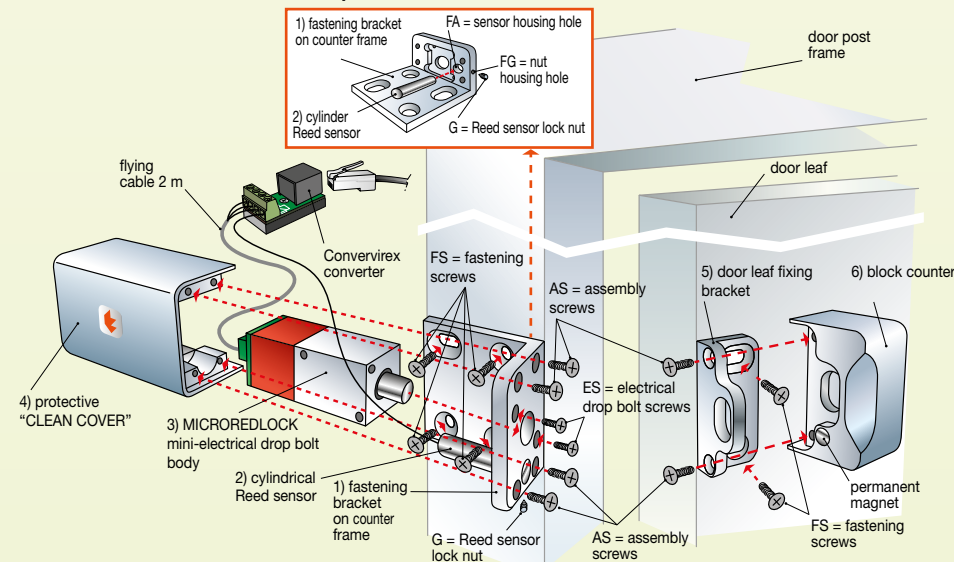

Example of a door complete with permanently assembled MICROREDLOCK mini-electrical drop bolt

element "A" (mini-electrical drop bolt) element "B" (block counter)



Element "A" exploded view
"CLEAN COVER" that includes the mini-electrical drop bolt (to be secured on the counter frame)


Element "A" assembly sequence
to be secured on counter frame:

- secure the bracket (1) on the counter frame with the four FS fastening screws.
- place the cylindrical Reed sensor (2) in the matching FA hole.
- lock the sensor by screwing the G nut into the FG hole.
- secure the mini-electrical drop bolt body (3) to the bracket (1) with the two supplied ES screws.
- insert the protective cover (4) over the assembled electrical drop bolt (3), + bracket (1) + sensor (2). Complete by securing the case (4) with the four supplied AS assembly screws that bind the components.

Element "B" exploded view
"CLEAN COVER" that includes the block counter bolt (to be secured on the door leaf)


Element "B" assembly sequence
to be fastened on the door leaf

- secure the bracket (5) on the door leaf with the two FS fastening screws.
- insert the block counter bolt (6) on the bracket and fasten together with the two supplied AS assembly screws that bind the two components together.

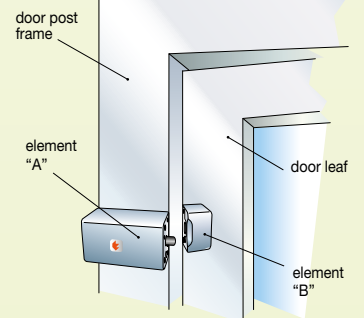

Note:
AS = 6 supplied assembly screws
ES = 2 supplied electrical drop bolt screws.
FS = 6 fastening screws supplied by the installer (based on the type of door frame).
G = 1 supplied nut.

INNOVATION



SLIM-DOORSTRIKE

in "CLEAN COVER" for easy installation surface mount

PROFESSIONAL TECNODIMENSIONE ULTRA COMPACT ELECTRICAL DOOR STRIKE

With full coverage "CLEAN COVER" made by single block of anodised aluminium.

One unit...
for 4 different needs.

- 1st No frame cutting nor work on internal nervures.
Just drill to install = **DRILL&GO CUT-FREE**
- 2nd instant wiring ZEROTIME = **Click&Go**
- 3rd housed into CLEAN COVER fully made by single block of anodised aluminium, easy to clean with appropriate detergents = **CLEAN**
- 4th fail-safe; it automatically unlocks in the event of power failure freeing the door for emergency exit also in the event of fire = **FAIL-SAFE**

FOR EASY INSTALLATION
SURFACE MOUNT


innovation



IDEAL FOR SURFACE APPLICATIONS
ON "CLEAN ROOM" LOCKS

1st
**DRILL&GO
CUT-FREE**

**DRILL&
GO**
Cut-Free®

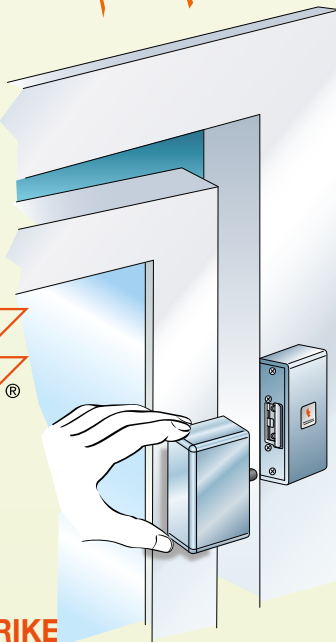


SLIM-DOORSTRIKE

it is ultra slim, designed to be easily installed on the door surface without any holes and/or cuts in the frame...

... it's **DRILL&GO CUT-FREE!**

2nd
**Click&
GO**

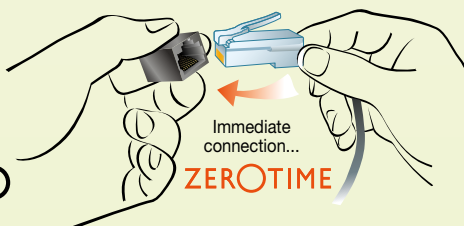


Insert the plug connector... snap it in place...
that's all you need
for a perfectly working system...

Click&Go!

3rd **CLEAN**

SLIM-DOORSTRIKE

housed into protective smooth "CLEAN COVER" (roughness-free) ... easy to clean with appropriate detergents...
... it's **CLEAN!**





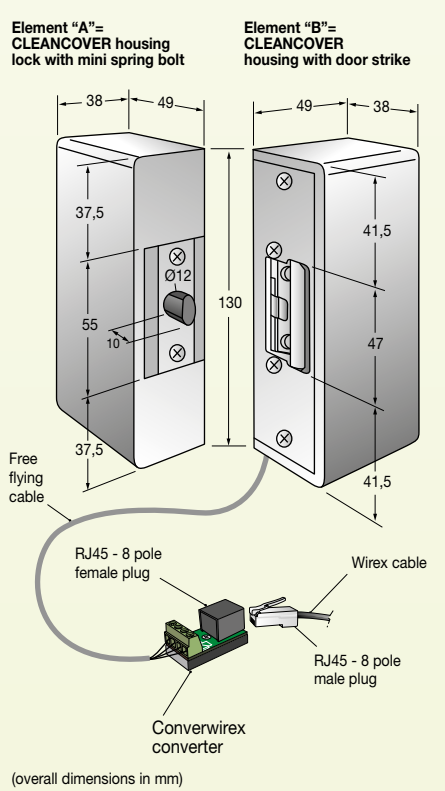
4th
FAIL-SAFE



SLIM-DOORSTRIKE


Automatic fail-safe unlock.
In the event of fire or power failure it automatically unlocks freeing the exit...

... it's **FAIL-SAFE!**

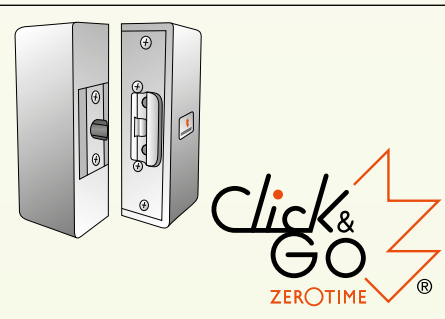	<p>ULTRA COMPACT ELECTRICAL DOOR STRIKE</p> <p>SLIM-DOORSTRIKE in "CLEAN COVER"</p> <p>by single block for easy surface mount</p> <p>Electrical door strike with full coverage "CLEAN COVER" made by single block of anodised aluminium. Ideal for surface mount and surface applications on any type of "CLEAN ROOM" door frame.</p>	<p>Export Product-list January 2024</p>  <p>Ordering information</p> <p>MODELS</p> <p>Q.ty N°</p>
<p>"CLICK & GO" SLIM-DOORSTRIKE for surface mounting in protective "CLEAN COVER" housing</p> <p>Element "A" = CLEANCOVER housing lock with mini spring bolt</p> <p>Element "B" = CLEANCOVER housing with door strike</p>  <p>(overall dimensions in mm)</p>	<p>Ultra compact SLIM-DOORSTRIKE electrical door strike housed into protective "smooth" (roughness-free) and easy to clean case. Manageable and easy to install on door surfaces without any need to drill and/or cut door frames.</p> <p>Models for 12 Vdc power supply</p> <p>SLIM-DOORSTRIKE electrical door strike in "CLEAN COVER". Complete with flying cable (2m) with "CLICK & GO" Converwirex converter with 1 female RJ45-8 pole quick fit plug for instant connection to the Pharmatronix control unit via structured and pre-assembled Wirex cables.</p> <p>Protective Anticorodal, anodised and mechanically brushed aluminium "CLEAN COVER" made by single block for easy installation with concealed non-removable bracket.</p> <p>The kit contains two components: element "A": is the case that includes the electrical reference to be secured on counter frame. element "B": is the loose reference bolt to be secured on the door leaf frame matching element "A".</p> <ul style="list-style-type: none"> - FAIL-SAFE (anti-panic = unlock without power) version with 100% ED coil for a continuous operation. - Includes a Reed sensor to control door status. - Power supply 12 V DC/390 mA. - Overall dimensions 137 x 49 x 38 mm (for each of the two units) - Weight kg 1,100 <p>Models for 24Vdc power supply (on request)</p> <p>Electrical door strike for surface mount SLIM-DOORSTRIKE in "CLEAN COVER" idem c.s. like above but with 24Vdc/140mA power.</p>	<p>0158J12DCW Lh/Rh reversible kit for pull-open doors</p> <p>0158J12SCW Lh/Rh reversible kit for push-open doors</p> <p>0158J14DCW 0158J14SCW</p>


SLIM-DOORSTRIKE ELECTRICAL BOLT IN "CLEAN COVER" ASSEMBLY METHOD

"A" element exploded view
Housing protective which includes mini spring bolt (to be mounted on door)

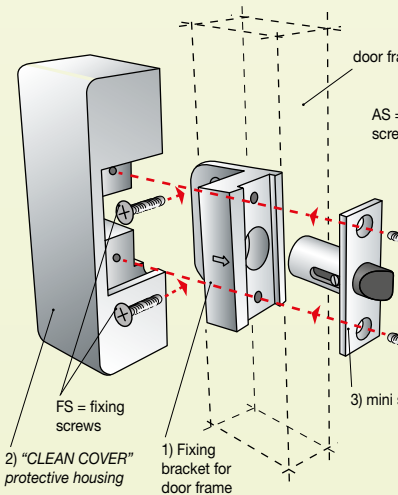


FS = fixing screws
AS = assembly screws
SDS = Screws for electrical door strike
3) mini spring bolt
2) "CLEAN COVER" protective housing
1) Fixing bracket for door frame

"B" element exploded view
Housing protective "CLEAN COVER" which includes electrical door strike (to be mounted on door-post)

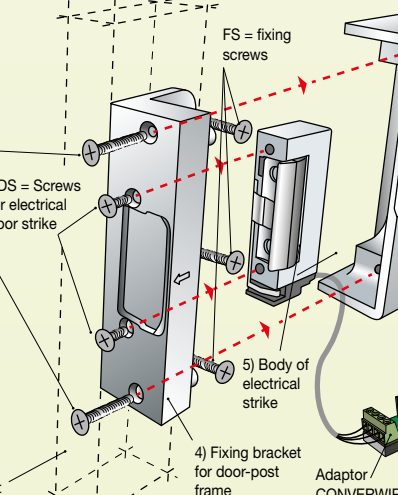

FS = fixing screws
AS = assembly screws
SDS = Screws for electrical door strike
5) Body of electrical strike
4) Fixing bracket for door-post frame
Door-post frame
Adaptor CONVERWIREX with free flying cable

Example of one door complete with doorstrike CLEANCOVER-DOORSTRIKE unit finally mounted

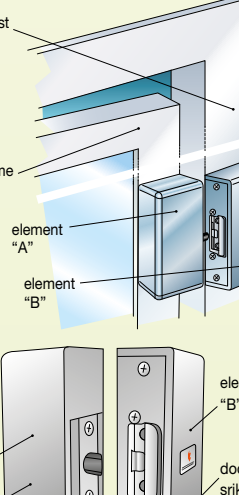

door-post frame
door frame
element "A"
element "B"

Assembly sequence for element "A"
to be mounted on door frame:

- secure the bracket (1) on the door with the two FS fixing screws
- Insert the protective housing (2) to cover the bracket (1).
- insert the mini spring bolt (3) in the hole in the bracket and assembly all parts with the two supplied pass-through AS screws that link all the three parts together.

Assembly sequence for element "B"
to be mounted on door-post frame:

- secure the bracket (4) on the door-post with three FS fastening screws.
- secure the electrical door strike body (5) with the two SDS screws supplied with the bracket (4).
- insert the protective housing (6) to cover the bracket (4) with electrical door strike (5) and connect all parts with the two AS supplied pass-through screws that link all the three parts together.

Note:
AS = 4 assembly screws (+ SDS = 2 screws for electrical door strike) supplied together.
FS = 5 fixing and fastening screws on frame should be provided by installer (based on type of frame).

INNOVATION



**PROFESSIONAL
ELECTRICAL LOCKS**

Introduction to the choice of Mini electromagnets multipurpose

The entire range of Tecnodimensione's professional electromagnets is designed and built to meet the most demanding “electromagnetic lockout” requirements.

The types of mini-electromagnets are intended for:



- Applications on structures designed keep specific doors closed. Not necessarily to provide extreme resistance to attempted break-in, but whose purpose is that of monitoring to prevent forced entry and to discourage misuse, diversions or damage to access doors. Doors through which unauthorised persons must not pass (e.g. emergency exits, classified areas such as sterile rooms, hospital wards with problematic patient areas, etc.). At the same time, these controlled doors can be opened and unlocked without jamming in the event of a hazard, fire, etc., becoming safe passageways or escape routes with automatic panic release in the event of a power failure.



- Very small, compact and elegantly designed. They achieve their goal of being “the electromagnetic locking block” with the lowest aesthetic impact on the door structure compared to conventional electromagnets available on the market.



- Two holding functions: front anchoring with “magnetic adhesion” or recessed with ‘shear locking’.



- Functional purposes: “Fail-Safe” automatic anti-panic and crush safe.




- Power supply: 12Vdc/7mA (very low consumption unit).



- External protection: with anodised monobloc aluminium “Clean Cover” protective housing machined from solid, for easy, non-removable surface mounting with no visible screws.

MINI ELECTROMAGNETS MULTIPURPOSE


**DRILL&
GO**
Cut-Free



2 types available

**FOR EASY
SURFACE MOUNT
INSTALLATION**

Slim Minisentrylock Series in "CLEAN COVER" housing

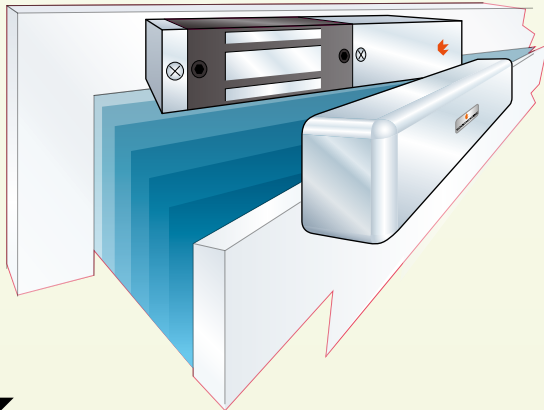

FRONT LOCKING


Front mounted mini-electromagnets with magnetic adhesion.

Frontal anchorage is achieved by magnetic adhesion between the face of the electromagnet and the face of the counter plate.



In practice, when the door is aligned in the stop moulding, the two coplanar surfaces fit together perfectly and a magnetic hold is established between them (with a powered holding electromagnet).

Key features:

- Fail-Safe: emergency unlock even in the event of a fault (release in the event of a power failure).
- Crush-safe: the unlock door command works even if pressure is applied to the door (e.g. crowds of people).
- Monitoring: fitted with a sensor to indicate door status (closed/open).

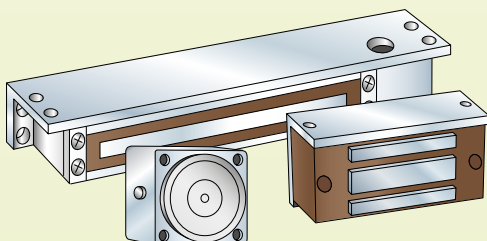

Slim Shearlock Series in "CLEAN COVER" housing

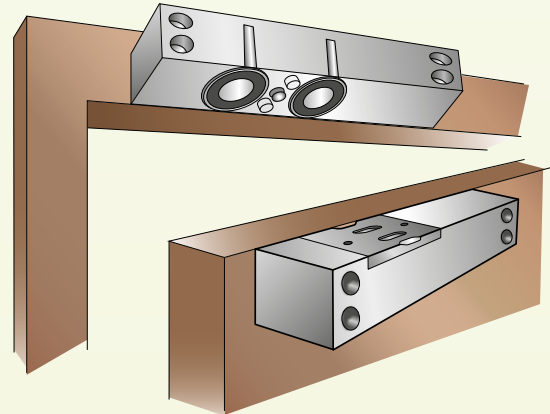

SHEAR LOCKING

Recessed shear-locking mini-electromagnets.

The shear anchoring is obtained by means of 2 stainless steel pins (located at the ends of the face of the electromagnet) which fit into the 2 correspondingly shaped seats (indentations) on the face of the floating counter plate.

In practice, when the door is aligned in the stop moulding, the electromagnet (when energised) attracts the face of the floating counter plate, which, when raised, aligns with the corresponding face of the electromagnet.

This causes the 2 stainless steel interlock with it. In this case, the high resistance shear locking is by recessed mounting.

Key features:


- Fail-Safe: emergency unlock even in the event of a fault (release in the event of a power failure).
- Resistance: is greatly increased (compared to simple magnetic adhesion) due to the magnetic interlocking of the two stainless steel pins.
- Monitoring: fitted with a sensor to indicate door status (closed/open)

OTHER TYPES AVAILABLE

Universal Magnets of VARIOUS STRENGTHS and DIMENSIONS

see page 62

ELECTROMAGNET

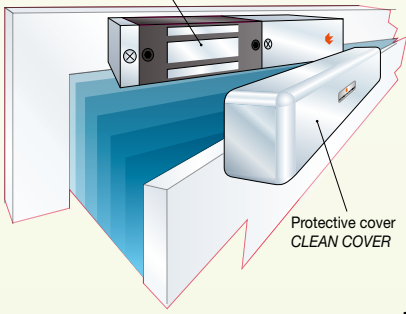

SLIM-MINISENTRYLOCK in "CLEAN COVER" for easy installation surface mount

TECNODIMENSIONE PROFESSIONAL ELECTROMAGNETS

Frontal door safety locks. Mini-compact unit with one-piece "CLEAN COVER" made of anodised aluminium.

One unit...
for 4 different needs.

FOR EASY INSTALLATION
SURFACE MOUNT

1st No frame cutting nor work on internal nervures.
Just drill to install = **DRILL& GO CUT-FREE**

2nd instant wiring ZEROTIME = **Click&Go**

3rd housed into CLEAN COVER fully made by single block of anodised aluminium, easy to clean with appropriate detergents = **CLEAN**


4th fail-safe; it automatically unlocks in the event of power failure freeing the door for emergency exit also in the event of fire = **FAIL-SAFE**

DRILL& GO
Cut-Free

innovation




IDEAL FOR SURFACE APPLICATIONS
ON "CLEAN ROOM" LOCKS.

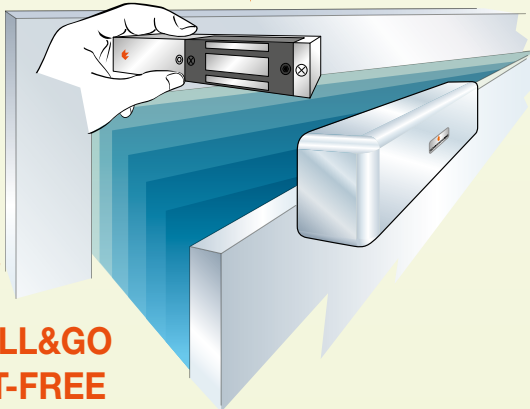


1st
**DRILL&GO
CUT-FREE**

SLIM-MINISENTRYLOCK
it is ultra slim, designed to be easily installed
on the door surface without any
holes and/or cuts in the frame...
...i'ts **CUT-FREE!**

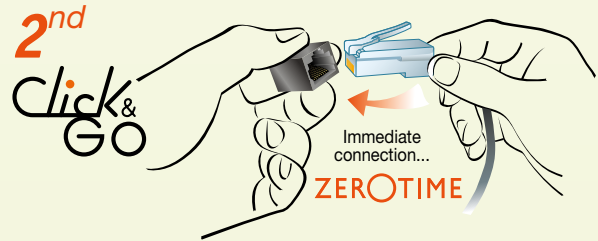

Insert the plug connector... snap it in place...
that's all you need
for a perfectly working system...
Click&Go!

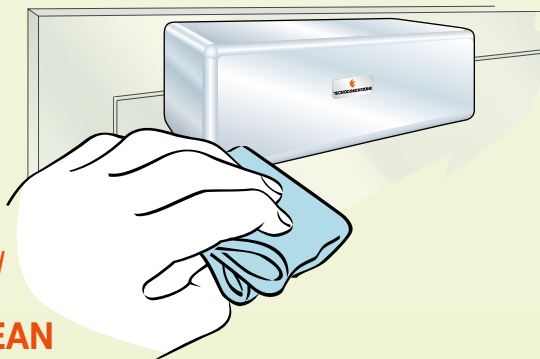


3rd
CLEAN

SLIM-MINISENTRYLOCK
housed into protective smooth "CLEAN COVER"
(roughness-free) ...
easy to clean with appropriate detergents...
... i'ts **CLEAN!**

4th
FAIL-SAFE



SLIM-MINISENTRYLOCK
Automatic fail-safe unlock.
In the event of fire or power failure it
automatically unlocks freeing the exit...
... i'ts **FAIL-SAFE!**

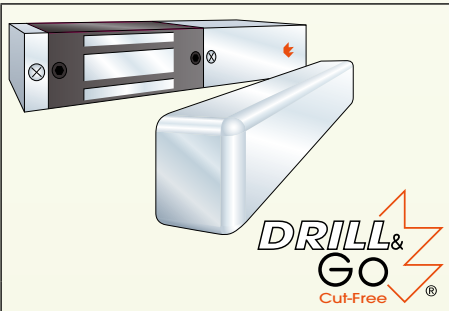

DRILL & GO
Cut-Free®

PROFESSIONAL MINI ELECTROMAGNETS SLIM-MINISENTRYLOCK in "CLEAN COVER" Eletromagnetic crush-safe lock

Export Product-list
January 2018



TECNODIMENSIONE®

Mini electromagnet with full coverage "CLEAN COVER" made by single block of anodised aluminium.
Ideal for surface mount and surface applications on any type of "CLEAN ROOM" door frame.

ordering information

Q.ty


MODELS

N°


SLIM-MINISENTRYLOCK "CLICK & GO"

for surface mounting in protective "CLEAN COVER" housing

Element "A" = body of electromagnet

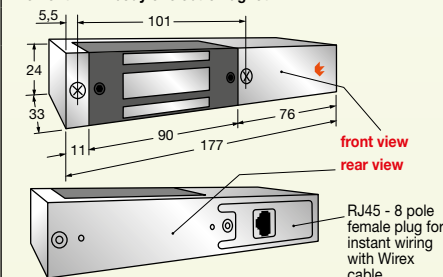

Element "B" = "CLEAN COVER" protective housing

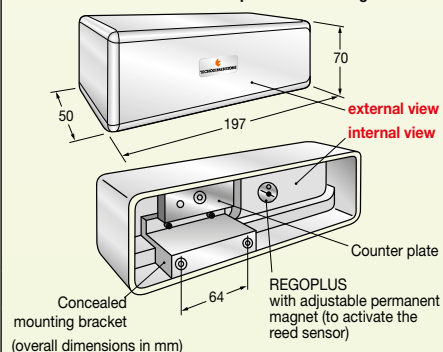

Ultra compact mini electromagnet SLIM-MINISENTRYLOCK encased in protective "smooth" (roughness-free) and easy to clean case. Manageable and easy to install on door surfaces without any need to drill and/or cut door frames.

Models for 12 Vdc power supply

Mini electromagnet SLIM-MINISENTRYLOCK in "CLEAN COVER" "CLICK & GO" technology, with 1 female RJ45-8 pole quick fit plug for instant connection to the Pharmatronix control unit via structured and pre-assembled Wirex cables.

0020804A2UW

The kit contains two components:

element "A": is the **electromagnet** (to be fitted to the top rail of the door frame) and

element "B": which is the **protective "CLEAN COVER"** (to be fitted over component "A" on the upper side of door leaf).

- 12 Vdc/70 mA power supply (units with very low consumption).
- Pressure resistance 60 Kp (equivalent to 600 Newton) to be enough and prevent adequately un-authorized opening of the door.

- Frontal lock with strike plate (armature)

- Adjustable Regoplus proximity reed sensor for controlling door status with 1A SPDT switch.

- Protective Anticorodal, anodised and mechanically brushed aluminium "CLEAN COVER" made by single block for easy installation with concealed non-removable bracket.

- Dimensions 197 x 70 x 50 mm



- Weight Kg 1.55

Models for 24 Vdc power supply


SLIM-MINISENTRYLOCK with "CLICK & GO" electromagnet as above but for a 24 V DC /50 mA power supply

0020804A4UW

CROSS SECTION VIEW

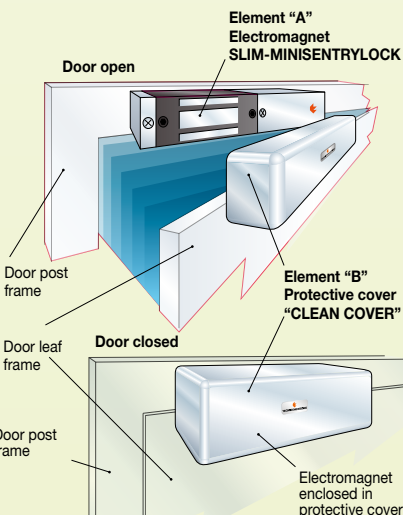
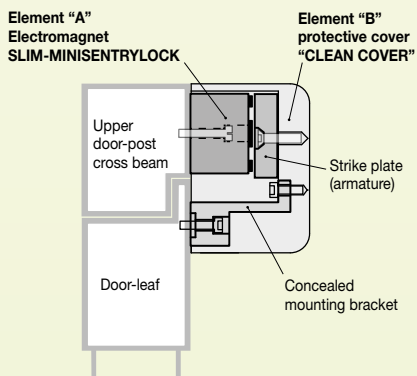


EXAMPLES OF WIREX FAST CONNECTING CABLES FOR "CLICK & GO" MODELS

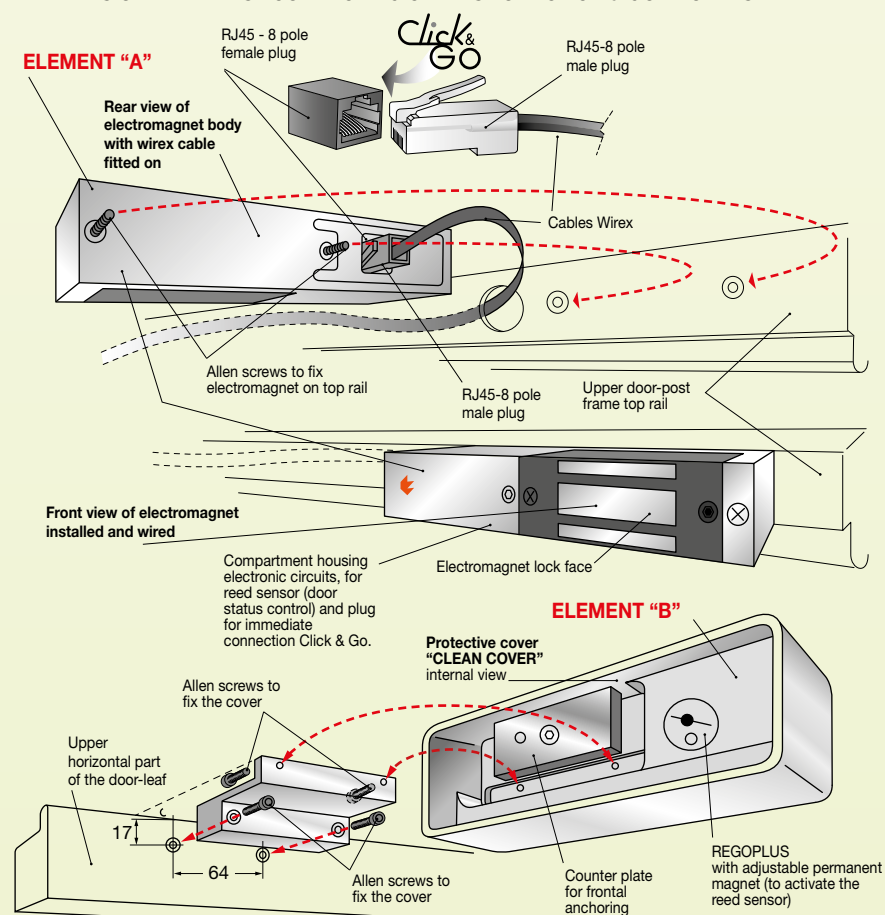

INNOVATION

BODY OF THE ELECTROMAGNET



FLOATING LOCKING ANCHOR

FOR EASY INSTALLATION
SURFACE MOUNT

**DRILL&
GO**
Cut-Free

innovation



SLIM-SHEARLOCK in "CLEAN COVER" housing for easy surface mounting


PROFESSIONAL MINI ELECTROMAGNETS TECNODIMENSIONE

Shear locking for anti-crowding a door protection.
Mini-compact unit with one-piece "CLEAN COVER" made of anodised aluminium.

One unit...
for 4 different needs.


- 1st No frame cutting nor work on internal nervures.
Just drill to install = **DRILL& GO CUT-FREE**
- 2nd instant wiring ZEROTIME = **Click&Go**
- 3rd housed into CLEAN COVER fully made by single block of anodised aluminium, easy to clean with appropriate detergents = **CLEAN**
- 4th fail-safe; it automatically unlocks in the event of power failure freeing the door for emergency exit also in the event of fire = **FAIL-SAFE**

IDEAL FOR SURFACE APPLICATIONS
ON "CLEAN ROOM" LOCKS.

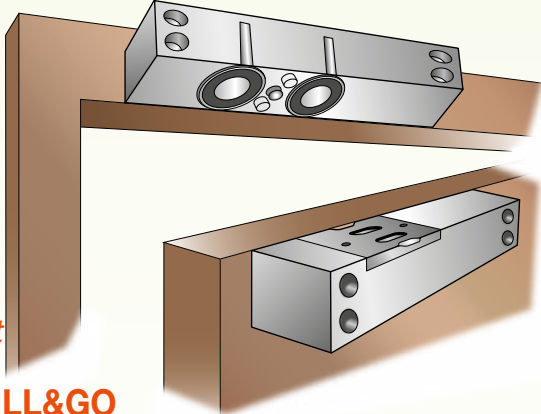


1st
**DRILL&GO
CUT-FREE**

SLIM-MINISENTRYLOCK
it is ultra slim, designed to be easily installed
on the door surface without any
holes and/or cuts in the frame...
...i'ts **CUT-FREE!**

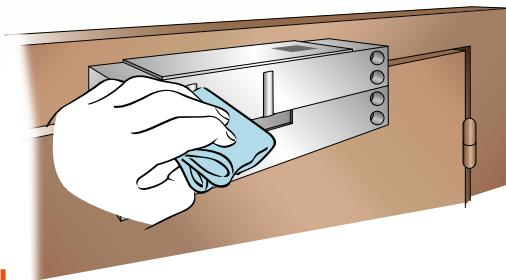

3rd
CLEAN

SLIM-MINISENTRYLOCK
housed into protective smooth "**CLEAN COVER**"
(roughness-free) ...
easy to clean with appropriate detergents...
... i'ts **CLEAN!**

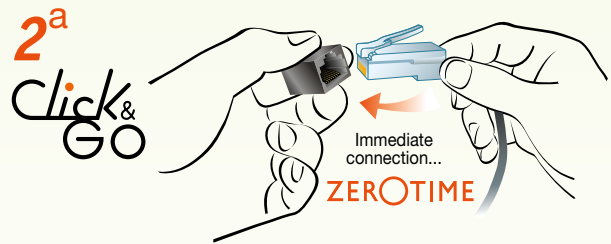


Insert the plug connector... snap it in place...
that's all you need
for a perfectly working system...
Click&Go!

4^a
FAIL-SAFE



SLIM-MINISENTRYLOCK
Automatic fail-safe unlock.
In the event of fire or power failure it
automatically unlocks freeing the exit...
... i'ts **FAIL-SAFE!**



Automatic fail-safe unlock. In the event of fire or power failure it automatically unlocks freeing the exit....it's **FAIL-SAFE!**

PROFESSIONAL MINI ELECTROMAGNETS

SLIM-SHEARLOCK

in "CLEAN COVER" housing
Shear-locking electromagnet

Export Product-list

January 2024



TECNODIMENSIONE®

Mini elettromagnet with full coverage "CLEAN COVER" made by single block of anodised aluminium. Ideal for surface mount and surface applications on any type of door frame = DRILL&GO.

Ordering information



Q.ty

MODELS

N°


SLIM-SHEARLOCK

"DRILL&GO" shear-locking holding electromagnet for surface-mounting

Ultra compact mini electromagnet SLIM-MINISENTRYLOCK encased in protective "smooth" (roughness-free) and easy to clean case. Manageable and easy to install on door surfaces without any need to drill and/or cut door frames = DRILL&GO.


Element "A"

body of electromagnet

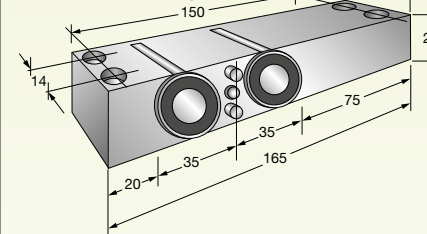

Element "A"

Body of electromagnet: rear view cable fitted

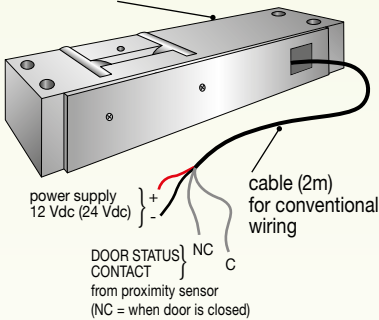

Models for 12 Vdc power supply

SLIM-SHEARLOCK fail-safe version (anti-panic) mini electromagnet in "CLEAN COVER" case complete with 4-lead flying cable (2 m) of which 2 from the door status sensor and 2 for power.

The kit contains two components:

element "A": is the electromagnet (to be fitted to the top rail of the door frame) and

element "B": which is the protective "CLEAN COVER" (to be fitted over component "A" on the upper side of door leaf).

- 12 Vdc/70 mA power supply (units with very low consumption).
- High thrust resistance due to 2 interlocking stainless steel pins
- Shear anchorage
- Protective Anticorodal, anodised and mechanically brushed aluminium "CLEAN COVER" made by single block for easy installation with concealed non-removable bracket.
- **element "A"**: overall dimensions electromagnet 165x29x29 mm
- **element "B"**: overall dimensions electromagnet 165x29x29 mm
- Weight kg 0,9


002093B2WEP

Models for 24 Vdc power supply

SLIM-SHEARLOCK electromagnet like above but with 24 Vdc/50 mA power supply


002093B4WEP

EXAMPLES OF CONNECTING ELECTROMAGNET SLIM-SHEARLOCK

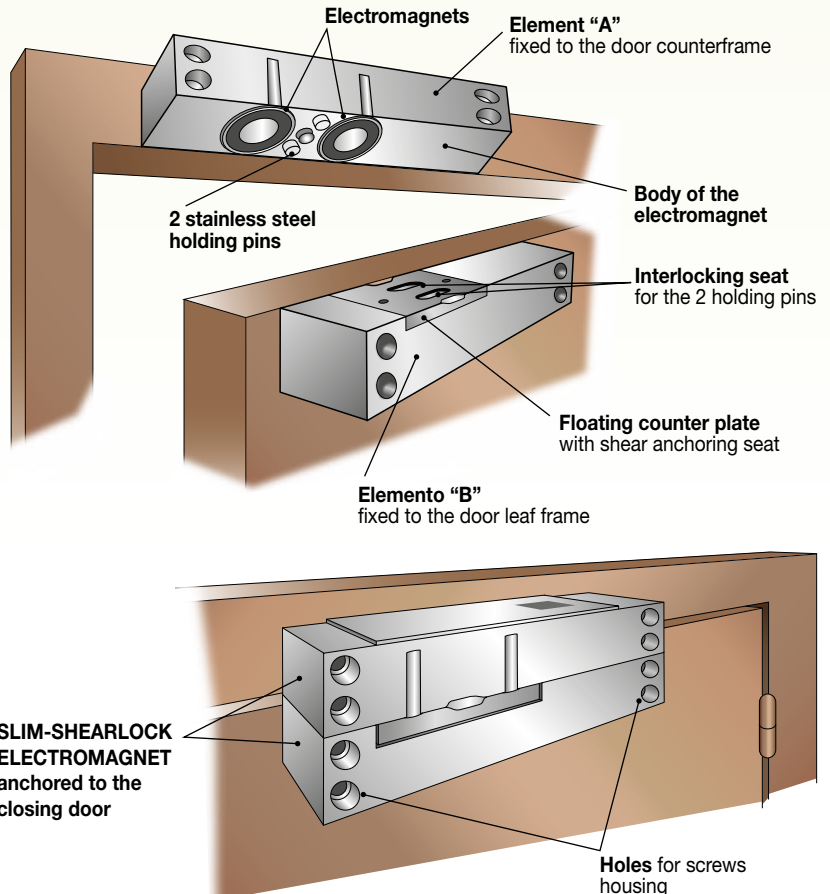


Element "B"

Floating locking anchor

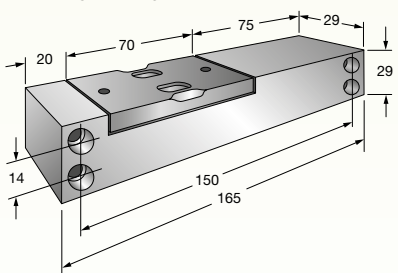

minimum distance 2 mm

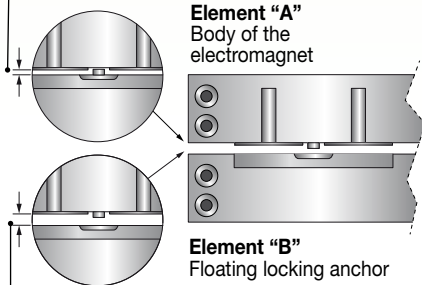

maximum distance 5 mm

(dimensions in mm)