


THE TRADITION CONTINUA...

with the same high quality as always!


professional electrical door strikes

Series PRO

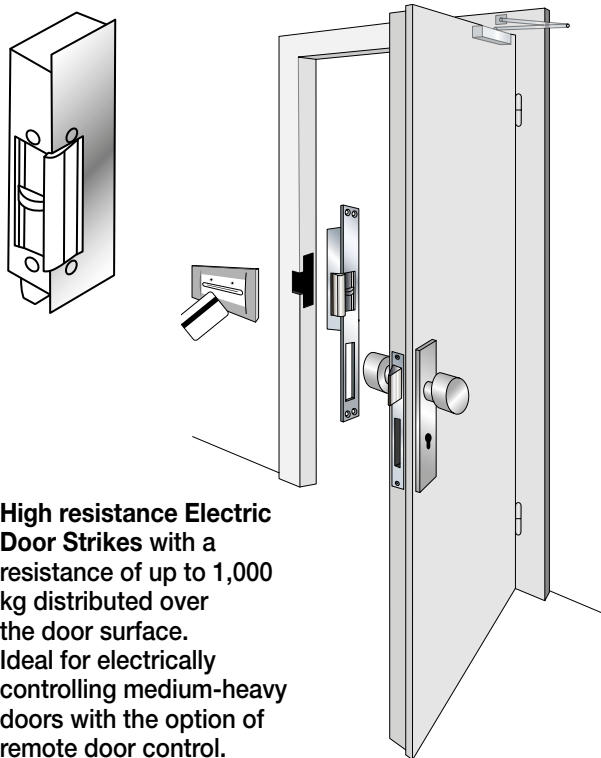


High resistance Electric Door Strikes with a resistance of up to 1,000 kg distributed over the door surface. Ideal for electrically controlling medium-heavy doors with the option of remote door control.

Series SIM

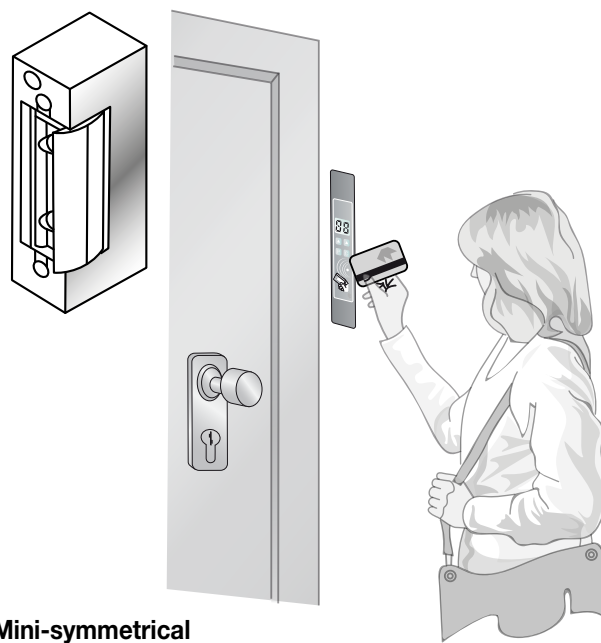

Mini-symmetrical Electric Door Strikes. Ideal for electrically controlling room doors in hotels, residences, offices, etc. with electronic opening control.

Series NEWARCUS

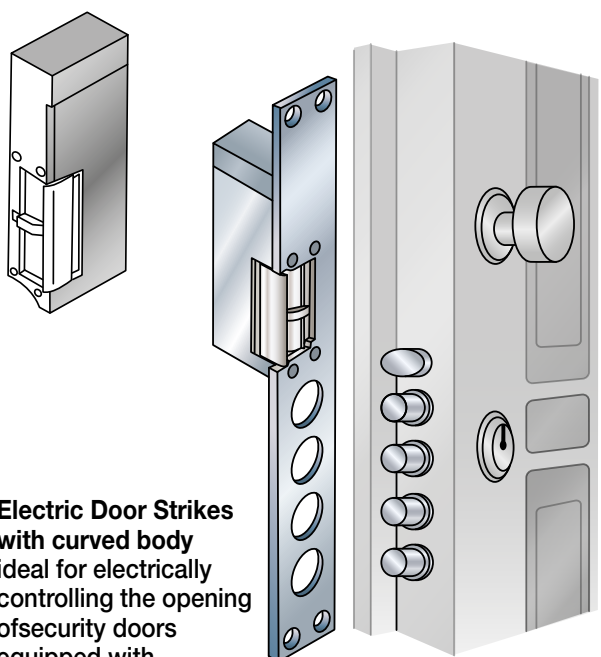

Electric Door Strikes with curved body ideal for electrically controlling the opening of security doors equipped with mechanical latch locks with multiple round deadbolts.

Series PA



Electric Door Strikes for panic bars to be applied, with external mechanism with a 'curved' crescent shaped spring latch. Ideal for 'electrically controlling' panic bar doors that can only be opened from the outside by authorised persons.

Series PRO - Professional electrical door strikes

Export Product-list - January 2024

TECHNICAL SPECIFICATIONS

Recess-mounting models.

OPERATING VOLTAGE	CURRENT DRAW	COIL	DOOR STATUS SENSOR	COIL STATUS SENSOR	COUNTER LATCH	MECHANICAL LATCH	HOLD UP VERSION	SECURE	SAFE	REVERSIBLE	REVERSIBLE	REVERSIBLE	REVERSIBLE
Vdc	mA	● = 100% ED HEAVY DUTY COIL ○ = STANDARD COIL	"RR" DOOR STATUS SENSOR 1 SPDT changeover contact	"TD" COIL STATUS SENSOR 1 SPDT changeover contact	ADJUSTABLE COUNTER LATCH	LEVER "L" = For mechanical unlatching	HOLD UP VERSION = with single pulse the door is open	FAIL-SECURE = version release with current	FAIL-SAFE = version release without current	Ra = Reversible asymmetrical	Rs = Reversible, symmetrical	D = DIN Left. - S = DIN Right	R = Reversible, for surface

SERIES PRO




Ordering information

Q.ty
N°

MODELS

PRO series high sealing

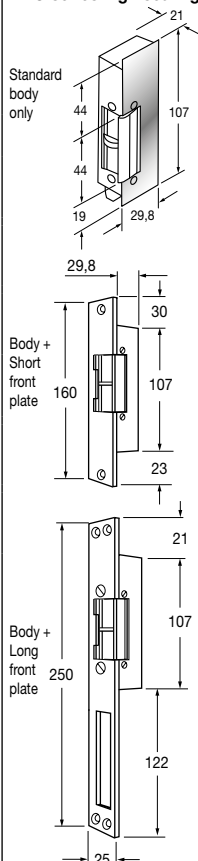


Series PRO professional electrical door strikes, with medium-high. Able to withstand pressures up to 700 kg (getting destroyed). Able to withstand pressures up to 500 kg without suffering damages.

Ideal to electrically and remotely control medium-heavy doors.

BODIES OF ELECTRIC DOOR STRIKES WITHOUT FRONT PLATES (see Front plate below)

12V	200	●	●	---	---	---	---	●	---	Ra	PRO 1 RR	0146J02R5
24V	150	●	●	---	---	---	---	●	---	Ra	PRO 1 RR	0146J04R5
12V	200	●	●	●	---	---	---	●	---	Ra	PRO 1 TD	0147J02R5
24V	150	●	●	●	---	---	---	●	---	Ra	PRO 1 TD	0147J04R5
12V	200	●	---	---	---	---	---	●	---	Ra	PRO 1	0140J02R4
24V	150	●	---	---	---	---	---	●	---	Ra	PRO 1	0140J04R4
12V	200	●	●	---	---	---	---	●	---	Ra	PRO 3 RR	0148J02R5
24V	150	●	●	---	---	---	---	●	---	Ra	PRO 3 RR	0148J04R5
12V	200	●	●	●	---	---	---	●	---	Ra	PRO 3 TD	0149J02R5
24V	150	●	●	●	---	---	---	●	---	Ra	PRO 3 TD	0149J04R5
12V	200	●	---	---	---	---	---	●	---	Ra	PRO 3	0144J02R4
24V	150	●	---	---	---	---	---	●	---	Ra	PRO 3	0144J04R4

Electric doors strike/lock coupling

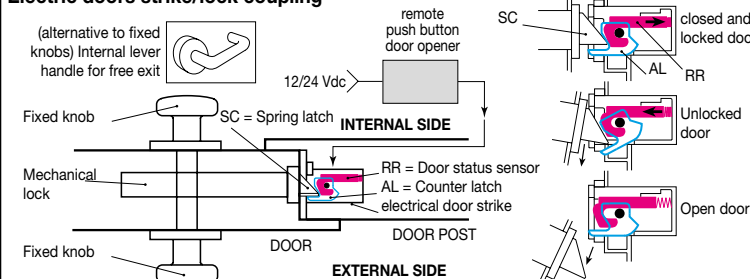

Mandatory ACCESSORIES

FRONT PLATES for the bodies of series PRO electrical door strikes


FORMAT	DIM. mm	PITCH	FIXING	MATERIAL	COLOUR
Lp=Long, flat plate	25x250	44	Reversible	Stainless steel	Satin finish
Lp=Long, flat plate	25x250	44	Reversible	Stainless steel	Brass finish, mirror
Lp=Long, flat plate	25x280	42	Reversible	Stainless steel	Satin finish
Cp=Long, flat plate	25x160	---	Reversible	Stainless steel	Satin finish
Cp=Long, flat plate	25x200	---	Reversible	Stainless steel	Satin finish
Ca=Short, angular	32x25x172	---	Reversible	Painted metal	B=gold
La=Long, angular	32x25x250	44	RHD/LHX ?	Painted metal	B=gold
La=Long, angular	32x25x250	44	RHD/LHX ?	Stainless steel	Satin finish
LapL=Long, flat, with lip	25/38x250	44	RHD/LHX ?	Stainless steel	Satin finish

Front plate only


010J43RX
010J43RXB
010J42RX
010J41RX
010J40RX
010J17BR
010J48B(D/S)
010J48X(D/S)
010J20TX(D/S)






Customised front plates for specific applications available on demand. Prices and quantities to be agreed.

FRONT PLATES (for the bodies of electrical door strikes, customisable according to the lock)

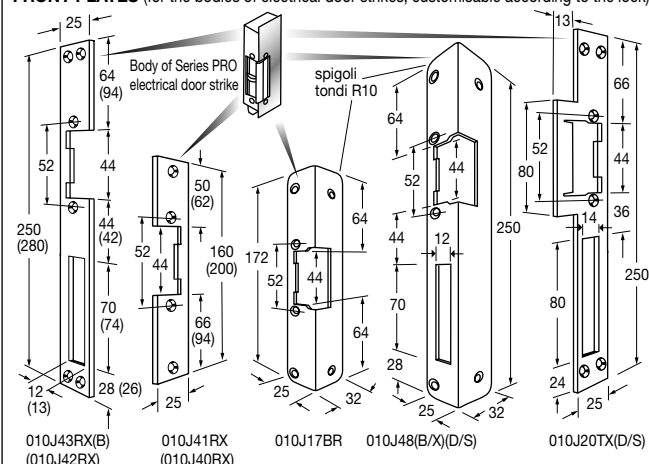

EXAMPLES OF APPLICATIONS

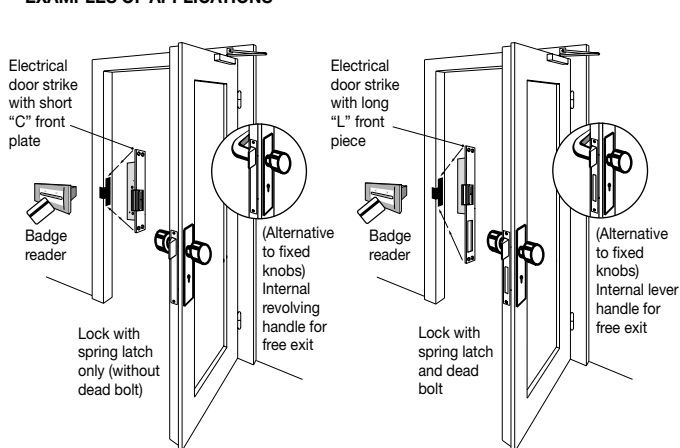

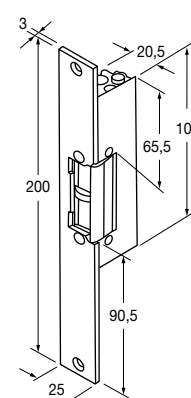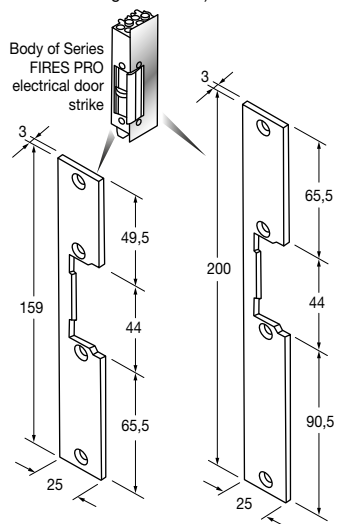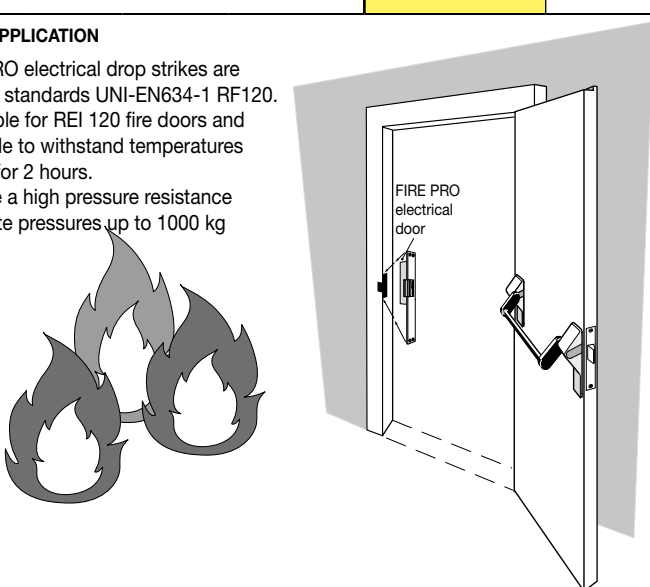Series FIRE PRO - Professional electrical door strikes for fire doors													Export Product-list January 2024		
High pressure resistance models for fire doors up to REI120 TECHNICAL SPECIFICATIONS Recess-mounting models.	OPERATING VOLTAGE Vdc	CURRENT DRAW mA	● = 100% ED HEAVY DUTY COIL ○ = STANDARD COIL	"RR" DOOR STATUS SENSOR 1 SPDT changeover contact	"TD" COIL STATUS SENSOR 1 SPDT changeover contact	A ADJUSTABLE COUNTER LATCH	LEVER "L" = For mechanical unlatching	HOLD UP VERSION = with single pulse the door is open	FAIL-SECURE = version release with current	FAIL-SAFE = "version release without current	Ra = Reversible asymmetrical Rs = Reversible, symmetrical D = DIN Left - S = DIN Right R = Reversible, for surface	SERIES FIRE PRO	TECNODIMENSIONE®		
													Ordering information		
													MODELS		
FIRE PRO for fire doors  Standard body only  Body + front plate	This advanced model of series PRO electrical door strikes is specifically designed for REI120 fire doors, that are designed to withstand fire for a maximum of 120 minutes, to provide a high pressure resistance a maximum up to of 1000 kg (10KNw). The final certification of the door is the responsibility of the door manufacturer, who does this by means of an 'incorporation' procedure for the various components mounted on the door.														
	BODIES OF ELECTRIC DOOR STRIKES WITHOUT FRONT PLATES (see Front plates below)												Body only		
	12V	200	●	●	---	---	---	---	●	---	D	FIRE PRO 1 RR	0126J02D		
	12V	200	●	●	---	---	---	---	●	---	S	FIRE PRO 1 RR	0126J02S		
	24V	150	●	●	---	---	---	---	●	---	D	FIRE PRO 1 RR	0126J04D		
	24V	150	●	●	---	---	---	---	●	---	S	FIRE PRO 1 RR	0126J04S		
	12V	200	●	---	---	---	---	---	●	---	D	FIRE PRO 1	0120J02D		
	12V	200	●	---	---	---	---	---	●	---	S	FIRE PRO 1	0120J02S		
	24V	150	●	---	---	---	---	---	●	---	D	FIRE PRO 1	0120J04D		
	24V	150	●	---	---	---	---	---	●	---	S	FIRE PRO 1	0120J04S		
	12V	200	●	●	---	---	---	---	●	---	D	FIRE PRO 3 RR	0128J02D		
	12V	200	●	●	---	---	---	---	●	---	S	FIRE PRO 3 RR	0128J02S		
	24V	150	●	●	---	---	---	---	●	---	D	FIRE PRO 3 RR	0128J04D		
	24V	150	●	●	---	---	---	---	●	---	S	FIRE PRO 3 RR	0128J04S		
	12V	200	●	---	---	---	---	---	●	---	D	FIRE PRO 3	0124J02D		
	12V	200	●	---	---	---	---	---	●	---	S	FIRE PRO 3	0124J02S		
	24V	150	●	---	---	---	---	---	●	---	D	FIRE PRO 3	0124J04D		
	24V	150	●	---	---	---	---	---	●	---	S	FIRE PRO 3	0124J04S		
Mandatory ACCESSORIES	FRONT PLATES for the bodies of series FIRES PRO electrical door strikes														
 Cp	FORMAT	DIM. mm	PITCH mm	FIXING	MATERIAL	COLOUR	Front plate only								
	Cp=Short, flat plate Cp=Short, flat plate	25X200 25X160	--- ---	Reversible Reversible	Stainless steel Stainless steel	Satin finish Satin finish	010J40RX 010J41RX								
	Note: the body of FIRE PRO electrical door strikes is compatible with all the front plate used for series PRO electrical door strikes.														
FRONT PLATES (for the bodies of electrical door strikes, customisable according to the lock)  010J41RX 010J40RX													EXAMPLE OF APPLICATION Series FIRE PRO electrical drop strikes are compliant with standards UNI-EN634-1 RF120. They are suitable for REI 120 fire doors and are virtually able to withstand temperatures up to 1150 °c for 2 hours. They also have a high pressure resistance and can tolerate pressures up to 1000 kg (10 KNw). 		

Series SIM - Mini-symmetrical electrical door strikes

Export Product-list - January 2024

TECHNICAL SPECIFICATIONS

Recess-mounting models.

OPERATING VOLTAGE	CURRENT DRAW	● = 100% ED HEAVY DUTY COIL	○ = STANDARD COIL	"RR" DOOR STATUS SENSOR 1 SPDT changeover contact	"TD" COIL STATUS SENSOR 1 SPDT changeover contact	ADJUSTABLE COUNTER LATCH	LEVER "L" = For mechanical unlatching	HOLD UP VERSION = with single pulse the door is open	FAIL-SECURE = "version release with current	FAIL-SAFE = version release without current	Ra = Reversible asymmetrical	Rs = Reversible, symmetrical	D = DIN Left - S = DIN Right	R = Reversible, for surface	SERIES SIM
Vdc	mA														




Ordering information

Q.ty
N°

MODELS

Series SIM

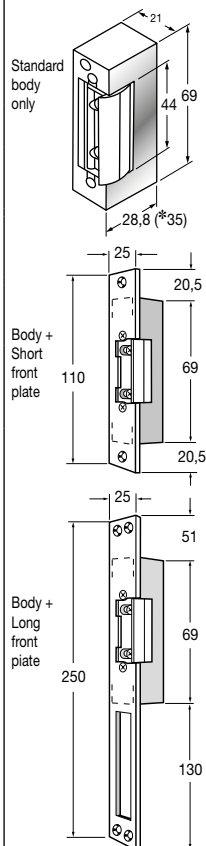


Series SIM electrical door strikes are the ideal solution to electrical locking of the doors of hotel, residence and office rooms, etc. using electronic opening command by badge readers or other types of readers, access control systems and/or numerical keypads and/or remote push-button panels, intercoms, etc.

BODIES OF ELECTRIC DOOR STRIKES WITHOUT FRONT PLATES PLATES (see Front plates below)

12V	200	●	---	---	●	---	---	---	---	Rs	SIM 1
24V	150	●	---	---	●	---	---	---	---	Rs	SIM 1
12V	200	●	---	---	●	---	---	---	●	Rs	SIM 3
24V	150	●	---	---	●	---	---	---	●	Rs	SIM 3
8÷12Vcc	800	○	---	---	●	---	---	---	---	Rs	SIM 2
8÷12Vcc	800	○	---	---	●	●	●	---	---	Rs	SIM 2L

Note: for model SIM with an "ULTRA DEEP" adjustable counter latch (13.5 mm), use code J3 instead of J1. For model SIM with "HIGH DEEP" counter latch (5.5 mm), use code J2 instead of J1.

Adjustment of the counter spring wing

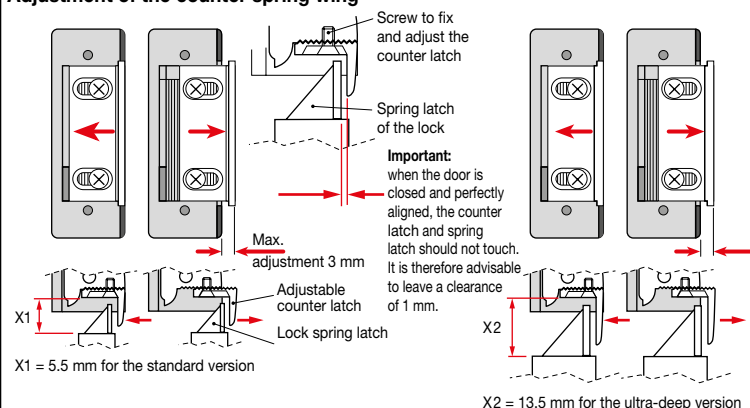

Body only

0130J12R
0130J14R
0134J12R
0134J14R
0132J15RA
0133J15RA

---J3---
---J2---

Mandatory ACCESSORIES

FRONT PLATES for the bodies of series SIM electrical door strikes


FORMAT	DIM. mm	PITCH	FIXING	MATERIAL	COLOUR
Cp=Short, flat plate	25x110	---	Reversible	Stainless steel	Satin finish
Cp=Short, flat plate	25x160	---	Reversible	Stainless steel	Satin finish
Lp=Long, flat plate	25x250	44	Reversible	Stainless steel	Satin finish
Lp=Long, flat plate	25x250	44	Reversible	Stainless steel	Brass finish, mirror
Lp=Long, flat plate	25x250	12,5	Reversible	Stainless steel	Satin finish
LapL=Long, flat, with lip	44x250	36	RHD/LHX ?	Stainless steel	Satin finish
Ca=Short, angular plates	25X32x172	---	Reversible	Painted steel	B=Gold
La=Long, angular plates	25X32x250	44	RHD/LHX ?	Painted steel	B=Gold
La=Long, angular plates	25X32x250	44	RHD/LHX ?	Stainless steel	Satin finish
La=Long, angular plates	25X32x250	12,5	RHD/LHX ?	Painted steel	B=Gold

Front plate only

010J02RX
010J41RX
010J43RX
010J43RXB
010J05RX
010J20X(D/S)
010J17RB
010J48B(D/S)*
010J48X(D/S)
010J13B(D/S)

*To assemble this model, remove the black cover from the body of the electric door release following the instructions supplied.
Customised front plates for specific applications available on demand.
Prices and quantities to be agreed.

RECESS-MOUNTING FRONT PLATES (for the bodies of electrical door strikes, customisable according to the lock)

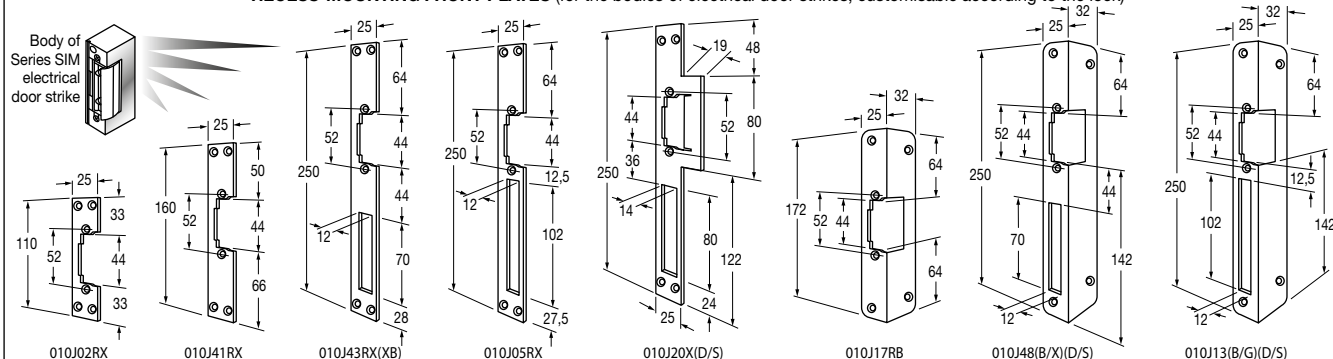

Series **NEWULTRA** - Mini-symmetrical electrical door strikes

Export Product-list

January 2024


TECNODIMENSIONE®

Ordering information



Q.ty

MODELS

N°

New series with extreme resistance

TECHNICAL SPECIFICATIONS

 odel.
High pressure resistance
(up to 1000 kg)

OPERATING VOLTAGE
Vdc

CURRENT DRAW
mA

 ● = 100% ED HEAVY DUTY COIL
○ = STANDARD COIL

 "RR" DOOR STATUS SENSOR
1 SPDT changeover contact

 "TD" COIL STATUS SENSOR
1 SPDT changeover contact

ADJUSTABLE COUNTER LATCH

LEVER "L" = For mechanical unlatching

HOLD UP VERSION = - with single pulse the door is open

FAIL-SECURE = version release with current

FAIL-SAFE = version release without current

Ra = Reversible asymmetrical


Rs = Reversible, symmetrical

D = DIN Left - S = DIN Right


R = Reversible, for surface

SERIES NEW ULTRA
Series NEW ULTRA
extreme resistance


Standard body only



Body only with RR sensor



Body + Long front plate

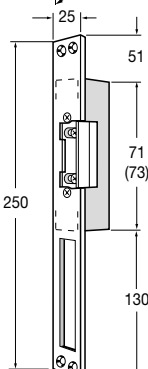


It is the advanced version of the conventional series SIM mini-symmetrical electrical door strike. Despite its ultra-small size, it offers the following two advantages:

- a) High pressure resistance up to 2000 kg (20 KNw)
b) Also available with RR sensor to control the door status.
It is the ideal solution for applications that require a higher resistance (up to 2000 kg).

BODIES OF ELECTRIC DOOR STRIKES WITHOUT FRONT PLATES (see Front plates below)


12V	250	●	●	---	●	---	---	●	---	Ra	SIM PLUS 1RR	0166J12R
24V	120	●	●	---	●	---	---	●	---	Ra	SIM PLUS 1RR	0166J14R
12V	250	●	---	---	●	---	---	●	---	Rs	SIM PLUS 1	0160J12R
24V	120	●	---	---	●	---	---	●	---	Rs	SIM PLUS 1	0160J14R
12V	250	●	●	---	●	---	---	●	---	Ra	SIM PLUS 3RR	0168J12R
24V	120	●	●	---	●	---	---	●	---	Ra	SIM PLUS 3RR	0168J14R
12V	250	●	---	---	●	---	---	●	---	Rs	SIM PLUS 3	0164J12R
24V	120	●	---	---	●	---	---	●	---	Rs	SIM PLUS 3	0164J14R
5÷12Vcc	600	○	---	---	●	---	---	---	---	Rs	SIM PLUS 2	0162J15R

Adjustment of the counter latch (for all models)

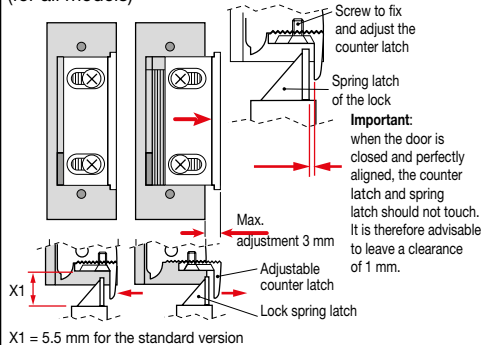

Model with RR sensor

Terminal board for RR sensor contacts (contacts are represented when the door is open)



Activation plate for the RR sensor controlling the door status


Mandatory ACCESSORIES

FRONT PLATES for the bodies of series SIM PLUS electrical door strikes

	FORMAT	DIM. mm	PITCH	FIXING	MATERIAL	COLOUR
	Cp=Short, flat plate	25x110	---	Reversible	Stainless steel	Satin finish
	Cp=Short, flat plate	25x160	---	Reversible	Stainless steel	Satin finish
	Lp=Long, flat plate	25x250	44	Reversible	Stainless steel	Satin finish
	Lp=Long, flat plate	25x250	44	Reversible	Stainless steel	Satin finish
	Lp=Long, flat plate	25x250	12,5	Reversible	Stainless steel	Shiny brass-plated
	LapL=Long, flat, with lip	44x250	36	Reversible	Stainless steel	Satin finish
	Ca=Short, angular plates	25X32x172	---	Reversible	Brass finish, mirror	G=grey/B=gold ?
	La=Long, angular plates	25X32x250	44	RHD/LHX ?	Brass finish, mirror	G=grey/B=gold ?
	La=Long, angular plates	25X32x250	44	RHD/LHX ?	Stainless steel	Satin finish
	La=Long, angular plates	25X32x250	12,5	RHD/LHX ?	Stainless steel	G=grey

 Customised front plates for specific applications available on demand.
Prices and quantities to be agreed.

FRONT PLATES (for the bodies of electrical door strikes, customisable according to the lock)

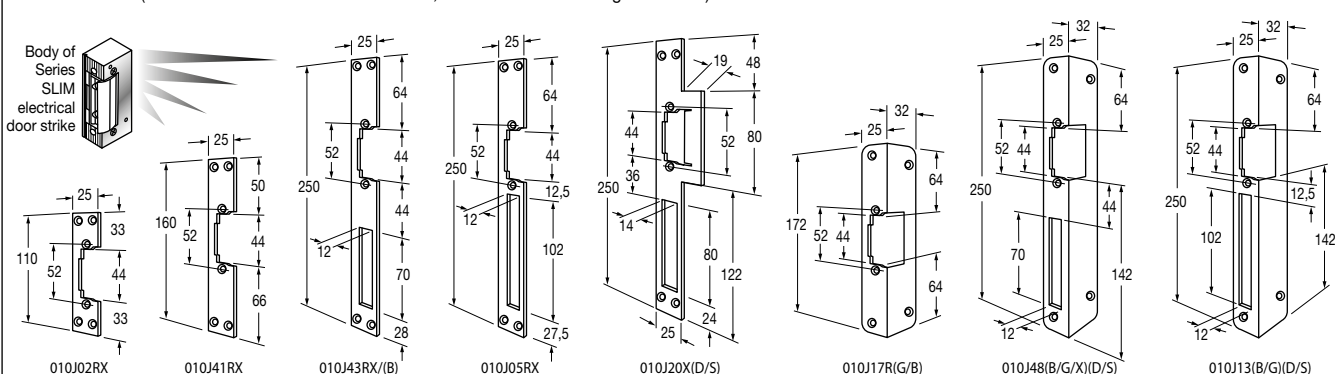

Series **NEWARCUS** - electrical strikes

Export Product-list

January 2024


TECNODIMENSIONE®

Ordering information



Q.ty

MODELS

N°

Series with curved body

TECHNICAL SPECIFICATIONS

Models for recessed mounting on multi-bolt security doors.

OPERATING VOLTAGE

Vdc

CURRENT DRAW

mA

● = 100% ED HEAVY DUTY COIL

 "RR" DOOR STATUS SENSOR
1 SPDT changeover contact

 "TD" COIL STATUS SENSOR
1 SPDT changeover contact

 ADJUSTABLE COUNTER LATCH
LEVER "L" = For mechanical unlatching

HOLD UP VERSION = with single pulse the door is open

FAIL-SECURE = version release with current

FAIL-SAFE = version release without current


 Ra = Reversible asymmetrical
Rs = Reversible, symmetrical

D = DIN Left - S = DIN Right

R = Reversible, for surface

SERIES ARCUS

NEWARCUS

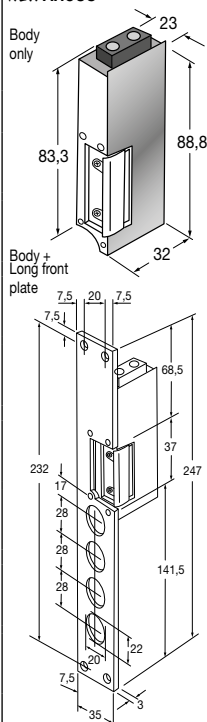

Ideal for electrically controlling the opening of security doors equipped with mechanical latch locks with very closely spaced multiple round deadbolts.

A version complete with RR sensor for door status control is also available.

BODIES OF ELECTRIC DOOR STRIKES WITHOUT FRONT PLATES (see Front plates below)

12V	200	●	---	---	●	---	---	●	---	D	ARCUS 1
12V	200	●	---	---	●	---	---	●	---	S	ARCUS 1
24V	100	●	---	---	●	---	---	●	---	D	ARCUS 1
24V	100	●	---	---	●	---	---	●	---	S	ARCUS 1
12V	200	●	---	---	●	---	---	---	●	D	ARCUS 3
12V	200	●	---	---	●	---	---	---	●	S	ARCUS 3
24V	100	●	---	---	●	---	---	---	●	D	ARCUS 3
24V	100	●	---	---	●	---	---	---	●	S	ARCUS 3
8-14V	500	○	---	---	●	---	●	---	---	D	ARCUS 2
8-14V	500	○	---	---	●	---	●	---	---	S	ARCUS 2
8-14V	500	○	---	---	●	●	●	---	---	D	ARCUS 2L
8-14V	500	○	---	---	●	●	●	---	---	S	ARCUS 2L

Body only

0190J02D

0190J02S

0190J04D

0190J04S

0194J02D

0194J02S

0194J04D

0194J04S

0192J15D


0192J15S

0193J15D

0193J15S

Mandatory ACCESSORIES

FRONT PLATES for the bodies of series ARCUS electrical door strikes



FORMAT

DIM.
mmPITCH
mm

FIXING

MATERIAL

COLOUR

 Lpv= Long plate 3 buttonholes
Lpf= Long plate 4 buttonholes

 35x247x3
35x247x3

 10
6

 Reversible
Reversible

 Stainless steel
Stainless steel


 Satin finish
Satin finish

Front plate only


010J60RX








010J70RX







FRONT PLATES (for the bodies of electrical door strikes, customisable according to the lock)

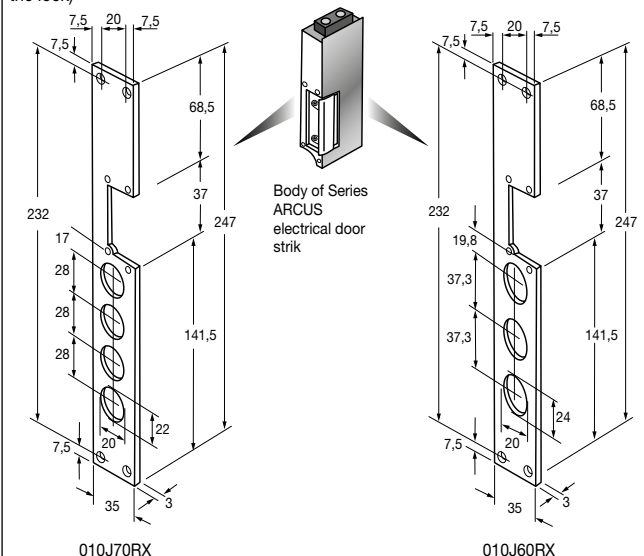

EXAMPLES OF APPLICATIONS

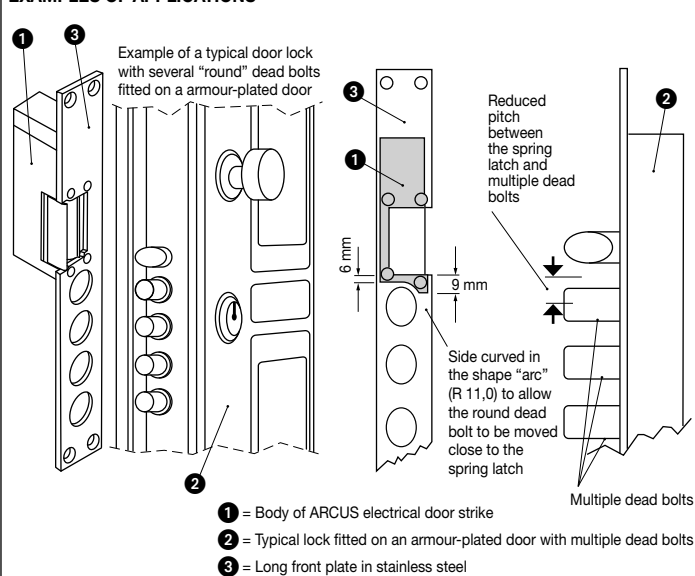

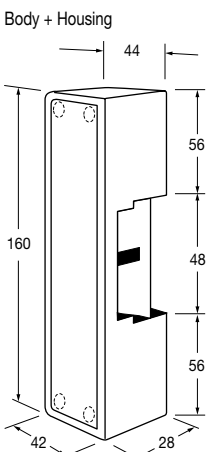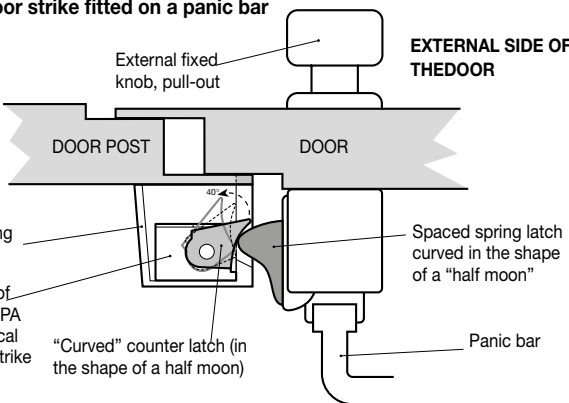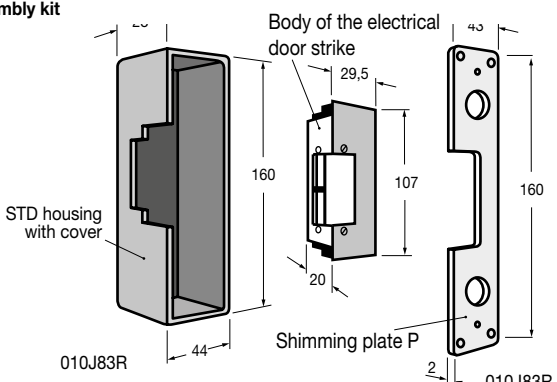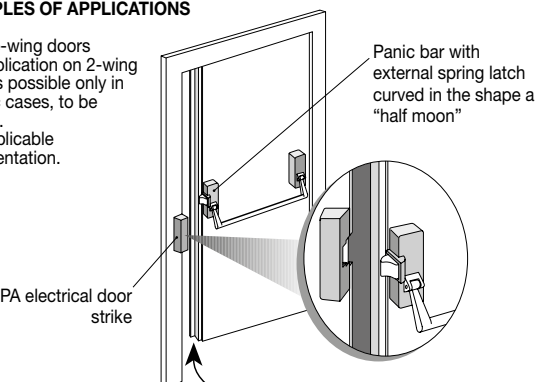Series PA - Electrical door strikes for panic bars													Export Product-list - January 2024					
TECHNICAL SPECIFICATIONS Models for external panic bars with "curved" spring latch (half-moon shape) and external mechanism	OPERATING VOLTAGE Vdc	CURRENT DRAW mA	● = 100% ED HEAVY DUTY COIL ○ = STANDARD COIL	"RR" DOOR STATUS SENSOR 1 SPDT changeover contact	"TD" COIL STATUS SENSOR 1 SPDT changeover contact	ADJUSTABLE COUNTER LATCH	LEVER "L" = For mechanical unlatching	I HOLD UP VERSION = with singlepulse the door is open	FAIL-SECURE = version release with current	FAIL-SAFE = version release without current	Ra = Reversible asymmetrical Rs = Reversible, symmetrical D = DIN Left - S = DIN Right R = Reversible, for surface	SERIES PA	 TECNODIMENSIONE®					
													Ordering information 					
													MODELS		Q.ty N°			
Series PA for external panic bars   Measures referred to an STD housing	Professional series PA electrical door strikes for panic bars (with "curved" spring latch and external mechanism). Ideal to "electrify" doors with panic bars that must be opened externally by authorised people only by using a magnetic card and/or typing a code on the keypad (access control system) or remote push-button panel (operator's console, intercom in gatekeeper's lodge, etc.).																	
BODIES OF ELECTRIC DOOR STRIKES WITHOUT HOUSINGS (see housings below)													Body only					
12V	200	●	●	---	---	---	---	---	---	---	R	PA1 RR	0146J02R7M					
24V	150	●	●	---	---	---	---	---	---	---	R	PA1 RR	0146J04R7M					
12V	200	●	●	●	---	---	---	---	---	---	R	PA1 TD	0147J02R7M					
24V	150	●	●	●	---	---	---	---	---	---	R	PA1 TD	0147J04R7M					
12V	200	●	---	---	---	---	---	---	---	---	R	PA1	0140J02R6					
24V	150	●	---	---	---	---	---	---	---	---	R	PA1	0140J04R6					
12V	200	●	●	---	---	---	---	---	---	---	R	PA3 RR	0148J02R7M					
24V	150	●	●	---	---	---	---	---	---	---	R	PA3 RR	0148J04R7M					
12V	200	●	●	●	---	---	---	---	---	---	R	PA3 TD	0149J02R7M					
24V	150	●	●	●	---	---	---	---	---	---	R	PA3 TD	0149J04R7M					
12V	200	●	---	---	---	---	---	---	---	---	R	PA3	0144J02R6					
24V	150	●	---	---	---	---	---	---	---	---	R	PA3	0144J04R6					
8÷12Vac	800	○	---	---	---	---	---	●	---	---	R	PA2	0142J02R6A					
PA electrical door strike fitted on a panic bar 																		
Mandatory ACCESSORIES		HOUSINGS for the bodies of series PA electrical door strikes											Housing only 010J83R 010J83R2					
 STD	 P	TYPE	SERIES	STD housing for surface-mounting, reversible, (44x28x160mm) black. Plate P - 2 mm for the shimming of the housing.														
		PA	JPAPA83/28															
		PA	PACC83															
Assembly kit 																EXAMPLES OF APPLICATIONS For one-wing doors (the application on 2-wing doors is possible only in specific cases, to be defined. See applicable documentation. 		

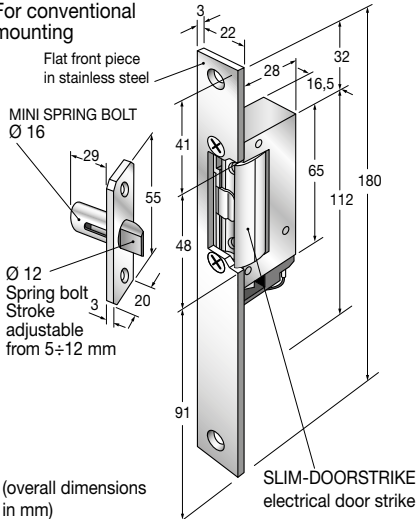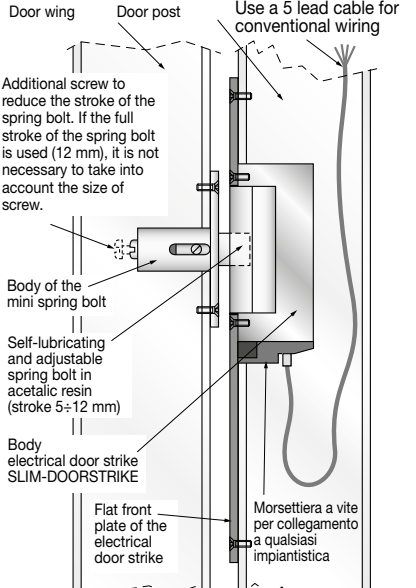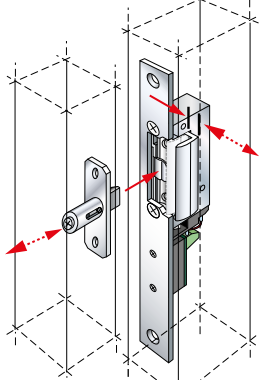	PROFESSIONAL ELECTRICAL DOOR STRIKES SLIM-DOORSTRIKE With screw-type terminal box for conventional applications		Export Product-list January 2024  TECNODIMENSIONE®		
SLIM-DOORSTRIKE with mini spring bolt For conventional mounting  (overall dimensions in mm) EXAMPLE OF RECESS-MOUNTING ON THE DOOR FRAME   SLIM-DOORSTRIKE (fail-safe and fail-secure) is supplied with a door status sensor (open/closed) that checks the penetration of the spring bolt (also adjustable) during closing, and the adjustable counter latch guarantees perfect leaf compensation and alignment... ... it's REGOSTRIKE!	Electrical door strike for recess-mounting. Ideal for ultraslim door frames.		Ordering information 		Q.ty N°
	MODELS				
	SLIM-DOORSTRIKE electrical door strikes for recess-mounting. Fail-secure version (security) = powered release. If there is no power, the SLIM DOORSTRIKE closes to prevent unauthorized access. Fail-safe version (antipanic) = release without power. If there is a fire in case of power latch, the SLIM DOORSTRIKE releases automatically to enable a safe evacuation.				
	Models for 12 Vdc power supply SLIM-DOORSTRIKE electrical door strike for conventional mount and screw terminal board for conventional connection to any system, even pre-existent. Fail-secure version with powered release. - With 100% ED reel for uninterrupted functioning. - RR microswitch sensor controlling the door status - Adjustable counter latch - 12 Vdc/280 mA power supply Supplied with flat front plate in stainless steel.		0156J12RM		
SLIM-DOORSTRIKE fail-safe version (antipanic). Same as above but releases in event of power latch.		0158J12RM			
Models for 24Vdc power supply SLIM-DOORSTRIKE fail-secure version (security). Same as above but with 24VDC/140 mA power supply.		0156J14RM			
SLIM-DOORSTRIKE fail-safe version (antipanic). Same as above but with 24VDC/140 mA of power latch.		0158J14RM			
Accessory (optional) Mini spring bolt for recess-mounting with adjustable spring bolt. Body with recess-mounting flange in anodised machined aluminium with a "silver" finish. Self-lubricating spring bolt in acetalic resin with stroke adjustable from 5 to 12 mm.		004910K			
MINI SPRING-BOLT FOR LIGHT DOOR Professional multipurpose version Ideal for small section frame of door with electrical door strike					
MINI SPRING LATCH FOR SMALL DOOR Type F for recess-mount  Universal recess-mounting mini spring latch Stainless steel slanted spring bolt adjustable on all "4 cardinal points". Fitting for manual release (with additional spring return rod). Housing F with recess-mounting flange in anodised machined aluminium and "silver" finish.		R	F	004910	
Type L for surface-mount  Universal surface-mounting mini spring latch Stainless steel slanted spring bolt adjustable on all "4 cardinal points". Fitting for manual release (with additional spring return rod). Housing L for surface-mounting in anodised machined aluminium and "silver" finish.		R	L	004912	
Adjustable mini spring bolt to quickly compensate the port 